


USB 2.0 Application Software

TDSUSB2, SR-USB, and DPO4USB Data Sheet



PEWA
Messtechnik GmbH
Weidenweg 21
58239 Schwerte
Tel.: 02304-96109-0
Fax: 02304-96109-88
E-Mail: info@pewa.de
Homepage: www.pewa.de

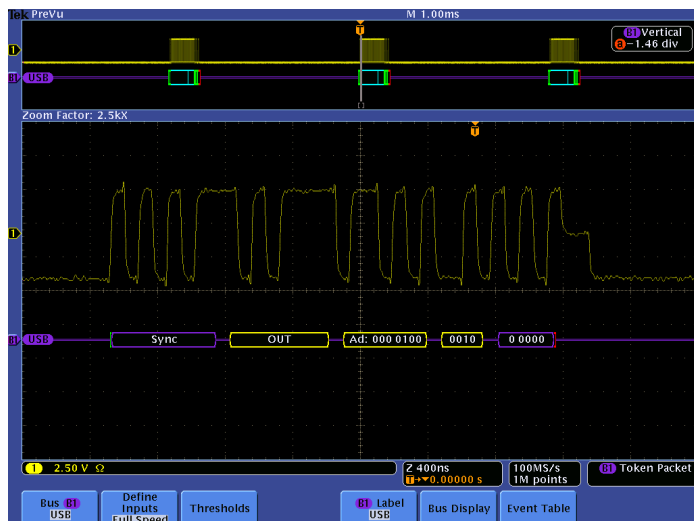

Applications

- Low-speed USB 2.0
- Full-speed USB 2.0
- High-speed USB 2.0

Tektronix provides comprehensive, integrated tool sets to serve the needs of engineers designing USB-based embedded systems as well as those validating the physical-layer compliance of USB 2.0 serial devices to the USB 2.0 standards.

The Tektronix TDSUSB2 USB 2.0 Compliance test application and selected Tektronix oscilloscopes provide one-button compliance testing for USB 2.0 devices as specified by the USB-IF. TDSUSB2 automates the compliance testing and allows engineers to perform the required tests efficiently and reliably right on their bench.

The Tektronix MSO/DPO4000 Series oscilloscopes with the DPO4USB Serial Application Module and MSO/DPO5000, DPO7000C, and DPO/DSA/MSO70000C Series oscilloscopes with the SR-USB application simplify analysis of USB 2.0 waveforms when validating and debugging USB-based embedded systems. DPO4USB offers automated trigger, decode, and search for low-speed, full-speed, and high-speed USB buses, enabling fast and efficient validation and debug.

Features & Benefits

TDSUSB2 USB 2.0 Compliance Testing

- Automated Compliance Testing for USB 2.0 Verification
- Designed for use with MSO/DPO5000, DPO7000, and DPO/DSA/MSO70000 Series Oscilloscopes

SR-USB USB 2.0 Triggering and Analysis


- Automated Trigger and Decode for USB 2.0
- Designed for use with the MSO/DPO5000, DPO7000C, and DPO/DSA/MSO70000C Series Oscilloscopes

DPO4USB USB 2.0 Triggering and Analysis

- Automated Trigger, Decode, and Search for USB 2.0
- Designed for use with the MSO/DPO4000 Series Oscilloscopes



TDSUSB2 compliance test results.

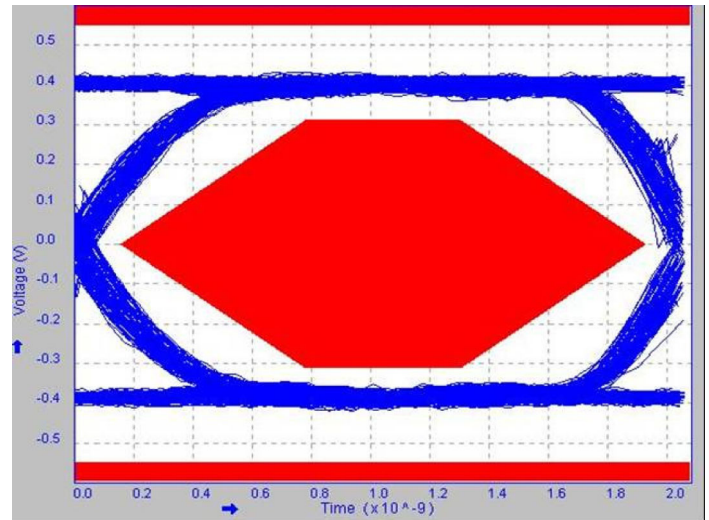

TDSUSB2 Automated USB eye diagram analysis.

TDSUSB2 – Automated USB 2.0 Physical Layer Compliance Testing

USB compliance testing has some unique measurement challenges:

- Designers must quickly and accurately perform all compliance tests recommended by the USB Implementers Forum, Inc. (USB-IF) before they can affix the “certified” USB-IF logo to their packaging
- Characterization of these electrical signals includes mask testing and parametric testing, for low-speed, full-speed, and high-speed hosts, devices, and hubs
- Signal speeds range from 1.5 Mb/s (low-speed) to 480 Mb/s (high-speed)

The TDSUSB2 provides automated compliance testing for USB 2.0 serial bus verification, including:


- Fully compliant with USB-IF tests for USB 2.0 compliance testing
- Automated eye diagram analysis verifies signal quality
- Automated oscilloscope setups for various tests eliminate time-consuming manual setups
- Comprehensive test fixture enables quick setup and signal access for a wide range of tests
- High-speed tests: Signal Quality, Receiver Sensitivity, Chirp, Reset, Resume, Suspend, Packet Parameter, and Monotonicity tests
- Automatic rise and fall time measurements simplify tests
- Automatic deskew for accurate measurements
- Online help fully documents test procedures
- User-configurable report formats for customization
- User-configurable measurement limits for tolerance testing



Measurement Select menu for the Signal Integrity test.

Quick Pass/Fail tests substantiated with results make the TDSUSB2 application the preferred solution for USB 2.0 physical-layer validation. In-depth analysis is possible with the statistical information about the tests performed. The user-defined measurement limits also help to perform tolerance testing on a design.

TDSUSB2 can be downloaded from www.tektronix.com and with the option license you can easily install the software on your oscilloscope. After installation, the application is accessible from the menu bar of the Tektronix Windows oscilloscopes. The user manual and other documents are copied at the application installation location on the oscilloscope's hard drive.

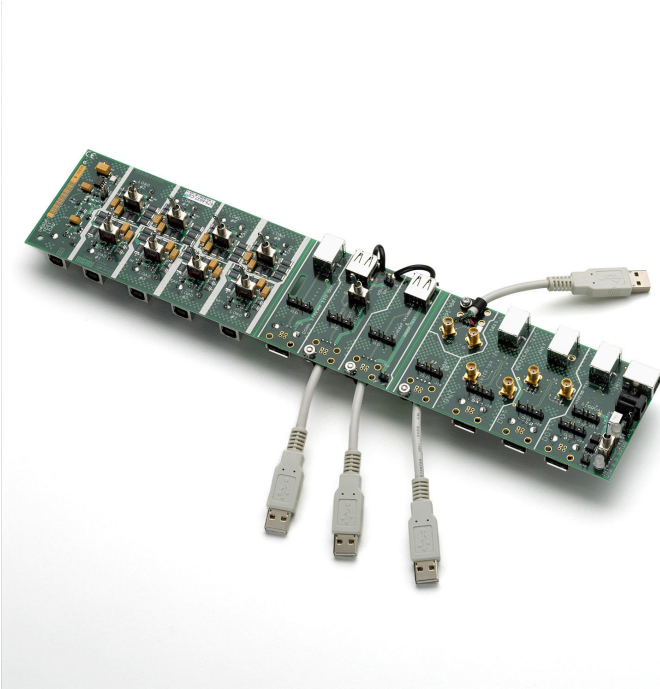

TDSUSB2 USB 2.0 Test Fixture.



Triggering on a specific PID on a USB full-speed bus. A complete set of triggers, including triggers for specific token (address) and data packet content, ensures you quickly capture your event of interest.

USB 2.0 Compliance Test Fixtures

A comprehensive compliance test fixture provides a probing solution for the Signal Quality, Inrush Current, Drop and Droop, Receiver Sensitivity, and Impedance Measurement test. Connectors are available for a data generator and Tektronix DSA8200 sampling oscilloscope with TDR module.

The test fixture is an accessory of TDSUSB2, and is ordered separately. The USB-IF logo-tagged 6 in. AB cable is shipped along with the test fixture.

SR-USB – USB 2.0 Triggering and Analysis

Debugging USB-based embedded systems designs provides some complex measurement and analysis challenges:

- Capturing specific USB addresses and data
- Displaying the elements of the USB message in an understandable format, in a variety of formats, for a wide variety of engineers and technicians
- Time-correlating USB messages with analog and digital signals in the embedded system
- Capture long time windows of USB traffic and then find specific events within the acquired data

The optional SR-USB application software, installed in an MSO/DPO5000, DPO7000C, or DPO/DSA/MSO70000C Series oscilloscope, provides a robust set of tools for debugging embedded systems with USB 2.0 serial buses, including:

- Automated serial triggering and decode for low-speed, full-speed, and high-speed USB 2.0 signals
- Trigger on all the critical elements of a USB bus such as address, data, etc.
- Decode all the critical elements of each USB message. No more counting 1s and 0s!
- Search through long acquisitions using user-defined criteria to find specific messages
- Event table shows decoded serial bus activity in a tabular, time-stamped format for quick summary of system activity

USB Serial Triggering

Trigger on packet content such as sync, reset, suspend/resume, token (address) packets with specific address and endpoint, specific data content, handshake packets, special packets, and errors.



Color-coded decoded display of low-speed USB bus, showing Sync, PID, CRC, and Stop components of the serial signal.

USB Serial Decode

The SR-USB application provides a higher-level, combined view of the individual signals that make up the USB bus, making it easy to identify where packets begin and end and identifying subpacket components such as sync, PID, data, CRC, errors, etc.

Are you wasting time manually decoding the waveform? Tired of having to visually inspect the waveform to count clocks, determine if each bit is a 1 or a 0, combine bits into bytes, and determine the hex value? Let the oscilloscope with the SR-USB application do it for you! Once you've set up a USB bus, the MSO/DPO5000, DPO7000C, or DPO/DSA/MSO70000C Series will decode each packet on the bus, and display the value in Hex, Binary, or ASCII in the bus waveform.

USB 2.0 Event Table


In addition to seeing decoded packet data on the bus waveform itself, you can view all captured packets in a tabular view much like you would see in a software listing. Packets are time stamped and listed consecutively with columns for each component (Time, PID, Address, Payload, and Errors).

USB 2.0 Search

USB packet content triggering is very useful for isolating the event of interest, but once you've captured it and need to analyze the surrounding data, what do you do? In the past, users had to manually scroll through the waveform counting and converting bits and looking for what caused




High-speed USB decoded display, automatically displaying bus content in any of several digital formats.

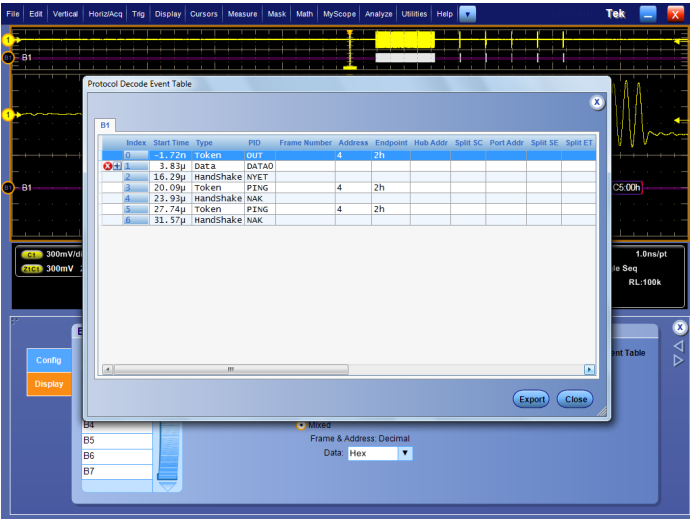


USB decoded Event table showing all packet information with time-stamp information.

the event. With the SR-USB application installed, you can enable the oscilloscope to automatically search through the acquired data for user-defined criteria including serial packet content. Each occurrence is highlighted by a search mark. Rapid navigation between marks is as simple as pressing the **Previous** (←) and **Next** (→) buttons on the oscilloscope front panel.

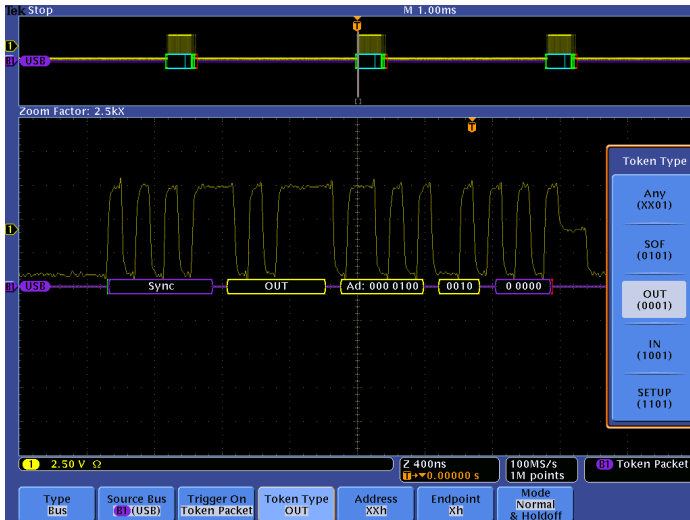

Triggering on a specific PID on an USB FS bus. A complete set of triggers, including triggers for specific Token (address) and data packet content, ensures you quickly capture your event of interest.

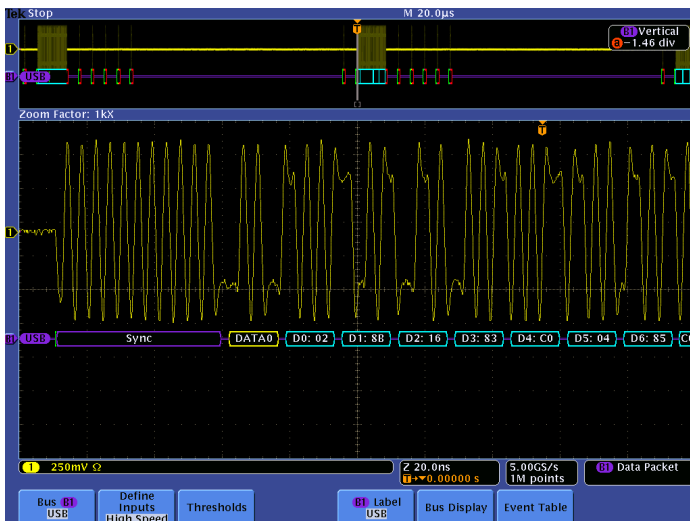

High-speed USB decoded display, automatically displaying bus content in any of several digital formats.

DPO4USB – USB 2.0 Triggering and Analysis

Debugging USB-based embedded system designs provides some complex measurement and analysis challenges:

- Capturing specific USB addresses and data
- Displaying the elements of the USB message in an understandable format, in a variety of formats, for a wide variety of engineers and technicians
- Time-correlating USB messages with analog and digital signals in the embedded system
- Capture long time windows of USB traffic and then find specific events within the acquired data

The optional DPO4USB application module, installed in an MSO/DPO4000 Series oscilloscope, provides a robust set of tools for debugging embedded systems with USB 2.0 serial buses, including:

- Automated serial triggering and decode for low-speed, full-speed, and high-speed USB 2.0 signals
- Trigger on all the critical elements of a USB bus such as address, data, etc.
- Decode all the critical elements of each USB message. No more counting 1s and 0s!
- Search through long acquisitions using user-defined criteria to find specific messages
- Event table shows decoded serial bus activity in a tabular, time-stamped format for quick summary of system activity

USB 2.0 Serial Triggering

Trigger on packet content such as sync, reset, suspend/resume, token (address) packets with specific address and endpoint, specific data content, handshake packets, special packets, and errors.

USB 2.0 Decode

The DPO4USB USB Serial Application Module provides a higher-level, combined view of the individual signals that make up the USB bus, making it easy to identify where packets begin and end and identifying subpacket components such as sync, PID, data, CRC, errors, etc.

Are you wasting time manually decoding the waveform? Tired of having to visually inspect the waveform to count clocks, determine if each bit is a 1 or a 0, combine bits into bytes, and determine the hex value? Let the oscilloscope with a DPO4USB application module do it for you! Once you've set up a USB bus, the MSO4000 or DPO4000 Series will decode each packet on the bus, and display the value in Hex, Binary, or ASCII in the bus waveform.

USB 2.0 Event Table

In addition to seeing decoded packet data on the bus waveform itself, you can view all captured packets in a tabular view much like you would see in a software listing. Packets are time stamped and listed consecutively with columns for each component (Time, PID, Address, Payload, and Errors).

USB 2.0 Search

USB packet content triggering is very useful for isolating the event of interest, but once you've captured it and need to analyze the surrounding data, what do you do? In the past, users had to manually scroll through the waveform counting and converting bits and looking for what caused the event. With a DPO4USB USB Serial Application Module, you can enable the oscilloscope to automatically search through the acquired data for user-defined criteria including serial packet content. Each occurrence is highlighted by a search mark. Rapid navigation between marks is as simple as pressing the **Previous** (←) and **Next** (→) buttons on the oscilloscope front panel.



USB decoded Event table showing all packet information with time-stamp information.

Characteristics

TDSUSB2

Characteristic	Description
TDSUSB2 Tests	Host, hubs, and devices
Signal Quality Tests	Eye Diagram Test, Jitter (JK, KJ, and consecutive), Crossover Voltage Range, Signal Rate, End-of-Packet Width, Rising-edge Rate, Falling-edge Rate
High-speed Tests	Receiver Sensitivity, Chirp, Reset, Resume, Suspend, Packet Parameter, and Monotonicity test
Inrush Current Check	Data-sufficiency readout. Coulombs and capacitance listed across inrush regions
Droop Test	Volts readout
Speed Selection	Low-speed (LS), Full-speed (FS), and High-speed (HS)
Signal Direction	Upstream and downstream
Test Point Selection	Near End and Far End
Report Generation Format	Plug-fest, user-specific, and Tektronix format

Recommended Tektronix Digital Oscilloscope

USB 2.0 Speed	Oscilloscope Bandwidth Required
Low-speed	≥350 MHz
Full-speed	≥350 MHz
High-speed	≥2 GHz

SR-USB

Instrument Compatibility

Oscilloscope	Description
MSO5054 DPO5054 MSO5034 DPO5034 DPO7054C	Trigger and Decode: Low-speed and Full-speed USB
MSO5204 DPO5204 MSO5104 DPO5104	Trigger and Decode: Low-speed, Full-speed, and High-speed USB
DPO7104C DPO7254C DPO7354C	Decode: Low-speed, Full-speed, and High-speed USB Trigger: Low-speed and Full-speed USB
All DPO/DSA/MSO70000C models	

Bus Setup Options

Characteristic	Description
USB 2.0 Compatibility	Low-speed and Full-speed: All MSO/DPO5000, DPO7000C, and DPO/DSA/MSO70000C Series models High-speed: MSO/DPO5204, MSO/DPO5104, DPO7354C, DPO7254C, DPO7104C, DPO/DSA/MSO70000C models only
Sources	Single-ended: Analog channels 1-4 Math channels 1-4 Digital channels D0-D15 (MSO5000 and MSO70000C Series only) Differential: Analog channels 1-4 Math channels 1-4
Recommended Probing	Low-speed and Full-speed: Single-ended or differential High-speed: Differential
Address/Data Formats Available	Hex, Binary, Decimal Decimal: Frame and Address Hex or ASCII: Data
Display Modes	
Bus	Bus only
Bus and waveforms	Simultaneous display of bus and digital waveforms
Event table	Decoded packet data in a tabular view

Bus Trigger Options

Characteristic	Description
Trigger and/or Search On	Low-speed: Trigger/Search on Sync, Reset, Suspend, Resume, End of Packet, Token (Address) Packet, Data Packet, Handshake Packet, Special Packet, Error. Token Packet – Any token type, SOF, OUT, IN, SETUP; Address can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular value, or inside or outside of a range. Frame number can be specified for SOF token using Binary, Hex, Unsigned Decimal, and Don't Care digits. Data Packet – Any data type, DATA0, DATA1; Data can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular data value, or inside or outside of a range. Handshake Packet – Any handshake type, ACK, NAK, STALL. Special Packet – Any special type, Reserved. Error – PID Check, CRC5, CRC16, Bit Stuffing. Full-speed: Trigger/Search on Sync, Reset, Suspend, Resume, End of Packet, Token (Address) Packet, Data Packet, Handshake Packet, Special Packet, Error. Token Packet – Any token type, SOF, OUT, IN, SETUP; Address can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular value, or inside or outside of a range. Frame number can be specified for SOF token using Binary, Hex, Unsigned Decimal, and Don't Care digits. Data Packet – Any data type, DATA0, DATA1; Data can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular data value, or inside or outside of a range. Handshake Packet – Any handshake type, ACK, NAK, STALL. Special Packet – Any special type, PRE, Reserved. Error – PID Check, CRC5, CRC16, Bit Stuffing. High-speed: Trigger/Search on Sync, Reset, Suspend, Resume, End of Packet, Token (Address) Packet, Data Packet, Handshake Packet, Special Packet, Error. Token Packet – Any token type, SOF, OUT, IN, SETUP; Address can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular value, or inside or outside of a range. Frame number can be specified for SOF token using Binary, Hex, Unsigned Decimal, and Don't Care digits. Data Packet – Any data type, DATA0, DATA1, DATA2, MDATA; Data can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular data value, or inside or outside of a range. Handshake Packet – Any handshake type, ACK, NAK, STALL, NYET. Special Packet – Any special type, ERR, SPLIT, PING, Reserved. SPLIT packet components that can be specified include: - Hub Address - Start/Complete – Don't Care, Start (SSPLIT), Complete (CSPLIT) - Port Address - Start and End bits – Don't Care, Control/Bulk/Interrupt (Full-speed Device, Low-speed Device), Isochronous (Data is Middle, Data is End, Data is Start, Data is All) - Endpoint Type – Don't Care, Control, Isochronous, Bulk, Interrupt Error – PID Check, CRC5, CRC16, Any.

Bus Decode

Characteristic	Description
USB 2.0 Data Rates	Low-speed: 1.5 Mb/s Full-speed: 12 Mb/s High-speed: 480 Mb/s
Decode Display	Start (green bar) PID (yellow packet) Data (cyan packet) CRC (purple packet) Stop (red bar)

DPO4USB**Instrument Compatibility**

Oscilloscope	Description
MSO4054 DPO4054*1 MSO4054B DPO4054B MSO4034 DPO4034*1 MSO4034B DPO4034B MSO4032 DPO4032*1	Trigger and Decode: Low-speed and Full-speed
MSO4104 DPO4104*1	Trigger: Low-speed and Full-speed Decode: Low-speed, Full-speed, and High-speed
MSO4104B DPO4104B	Trigger and Decode: Low Speed, Full Speed, and High Speed

*1 DPO4000 Series products with serial numbers <C020000 require an upgrade to support DPO4USB.

Bus Setup Options

Characteristic	Description
USB 2.0 Compatibility	Low-speed and Full-speed: All MSO4000 and DPO4000 Series models High-speed: MSO4104 and DPO4104 models only
Sources	Single-ended: - Analog channels 1-4 - Digital channels D0-D15 (MSO4000 Series only) Differential: - Analog channels 1-4 - Math channel - Reference channels 1-4
Recommended Probing	Low-speed and Full-speed: Single-ended or differential High-speed: Differential
Thresholds Presets	Low-speed and Full-speed: Single-ended (D+: 1.4 V; D–: –1.4 V), differential (High: 1.4 V; Low: –1.4 V) High-speed: Differential (High: 100 mV; Low: –100 mV)
Address/Data Formats Available	Hex, Binary, Decimal Decimal: Frame and Address Hex or ASCII: Data
Display Modes	
Bus	Bus only
Bus and waveforms	Simultaneous display of bus and digital waveforms
Event table	Decoded packet data in a tabular view

Bus Trigger Options

Characteristic	Description
Trigger and/or Search On	Low-speed: Trigger/Search on Sync, Reset, Suspend, Resume, End of Packet, Token (Address) Packet, Data Packet, Handshake Packet, Special Packet, Error. Token Packet – Any token type, SOF, OUT, IN, SETUP; Address can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular value, or inside or outside of a range. Frame number can be specified for SOF token using Binary, Hex, Unsigned Decimal, and Don't Care digits. Data Packet – Any data type, DATA0, DATA1; Data can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular data value, or inside or outside of a range. Handshake Packet – Any handshake type, ACK, NAK, STALL. Special Packet – Any special type, Reserved. Error – PID Check, CRC5, CRC16, Bit Stuffing. Full-speed: Trigger/Search on Sync, Reset, Suspend, Resume, End of Packet, Token (Address) Packet, Data Packet, Handshake Packet, Special Packet, Error. Token Packet – Any token type, SOF, OUT, IN, SETUP; Address can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular value, or inside or outside of a range. Frame number can be specified for SOF token using Binary, Hex, Unsigned Decimal, and Don't Care digits. Data Packet – Any data type, DATA0, DATA1; Data can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular data value, or inside or outside of a range. Handshake Packet – Any handshake type, ACK, NAK, STALL. Special Packet – Any special type, PRE, Reserved. Error – PID Check, CRC5, CRC16, Bit Stuffing. High-speed: Trigger/Search on Sync, Reset, Suspend, Resume, End of Packet, Token (Address) Packet, Data Packet, Handshake Packet, Special Packet, Error. Token Packet – Any token type, SOF, OUT, IN, SETUP; Address can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular value, or inside or outside of a range. Frame number can be specified for SOF token using Binary, Hex, Unsigned Decimal, and Don't Care digits. Data Packet – Any data type, DATA0, DATA1, DATA2, MDATA; Data can be further specified to trigger on $\leq$, $<$, $=$, $>$, $\geq$, $\neq$ a particular data value, or inside or outside of a range. Handshake Packet – Any handshake type, ACK, NAK, STALL, NYET. Special Packet – Any special type, ERR, SPLIT, PING, Reserved. SPLIT packet components that can be specified include: - Hub Address - Start/Complete – Don't Care, Start (SSPLIT), Complete (CSPLIT) - Port Address - Start and End bits – Don't Care, Control/Bulk/Interrupt (Full-speed Device, Low-speed Device), Isochronous (Data is Middle, Data is End, Data is Start, Data is All) - Endpoint Type – Don't Care, Control, Isochronous, Bulk, Interrupt Error – PID Check, CRC5, CRC16.

Bus Decode

Characteristic	Description
USB 2.0 Data Rates	Low-speed: 1.5 Mb/s Full-speed: 12 Mb/s High-speed: 480 Mb/s
Decode Display	Start (green bar) PID (yellow packet) Data (cyan packet) CRC (purple packet) Stop (red bar)

Ordering Information**TDSUSB2**

USB 2.0 Physical-layer Compliance Test Application.

Model	New Instrument Orders	Product Upgrades	Floating Licenses
MSO/DPO5000 Series	Opt. USB	DPO-UP Opt. USB	DPOFL-USB
TDS5000B Series	—	TDS5BUP Opt. USB	—
DPO7000 Series	Opt. USB	DPO-UP Opt. USB	DPOFL-USB
DPO/DSA/MSO70000 Series	Opt. USB	DPO-UP Opt. USB	DPOFL-USB

SR-USB

MSO/DPO5000 Series USB 2.0 Triggering and Analysis Application.

Model	New Instrument Orders	Product Upgrades	Floating Licenses
MSO/DPO5000 Series	Opt. SR-USB	DPO-UP Opt. SR-USB	DPOFL-SR-USB
DPO7000C Series	Opt. SR-USB	DPO-UP Opt. SR-USB	DPOFL-SR-USB
DPO/DSA/MSO70000C Series	Opt. SR-USB	DPO-UP Opt. SR-USB	DPOFL-SR-USB

DPO4USB

MSO/DPO4000 Series USB 2.0 Triggering and Analysis Application.

Model	New Instrument Orders	Product Upgrades	Floating Licenses
MSO/DPO4000 Series	DPO4USB	DPO4USB	—

Recommended Accessories

TDSUSB2

The P6248, P6330, TDP1500, and TDP3500 probes are approved for compliance testing.

Higher-performance active or differential probes may be used for design applications. It is recommended to use a probe with 1X attenuation for best results.

Please refer to www.tek.com/probes for further information on the recommended models of probes and any necessary probe adapters.

Accessory	Description
TDSUSBF	USB 2.0 Test Fixture
AWG5000C or AWG7000C Series	Arbitrary waveform generator, signal source for receiver sensitivity tests. 5X attenuators are required
DSA8200	Sampling oscilloscope, provides TDR measurements for impedance measurement tests. An 80E04 Time Domain Reflectometer (TDR) Sampling Module is required

SR-USB

Please refer to www.tek.com/probes for further information on the recommended models of probes and any necessary probe adapters.

DPO4USB

Please refer to www.tek.com/probes for further information on the recommended models of probes and any necessary probe adapters.

Additional Information

Tektronix offers a range of solutions for USB testing, including USB 3.0. To see a comprehensive listing, and download the latest resources, visit www.tek.com/USB.

TDSUSB2 solution updates and up-to-date instrument software upgrades are available at www.tek.com/downloads.



Product(s) are manufactured in ISO registered facilities.

