

# FLUKE®

## Fluke TiR Series Thermal Imagers


### Find building problems faster.

**IR-Fusion® Technology**—  
infrared and visual images fused  
together—makes infrared easy  
to understand

Designed especially for building  
and restoration applications

Rugged, reliable, easy to use...  
what Fluke tools reputation has  
been for over 50 years

Models for any application  
and budget



**IR-Fusion®**



# Locate building problems quickly and easily


Fluke TiR Series Thermal Imagers are built specifically for the building diagnostic industry. **Property managers** and **facility managers** use thermal imaging to protect investments and keep buildings in a well maintained, healthy state.

**Restoration professionals** are using thermal imaging to increase their business, differentiate themselves from their competitors and generate documentation in case they need to defend a future liability claim.


## Typical thermal imaging building applications:

Thermal imaging is an efficient, non-destructive testing method to detect (potential) problem areas such as:


- Moisture intrusion in roof systems, walls, flooring, ceilings and other building areas
- Leaks in water pipes, buried steam lines, water lines or underground heating systems and sprinkler systems
- Missing or inadequate insulation areas
- Heat or cooling loss, HVAC/R problem areas
- Connection problems in low voltage electrical systems
- Termite and pest issues
- Construction failure areas

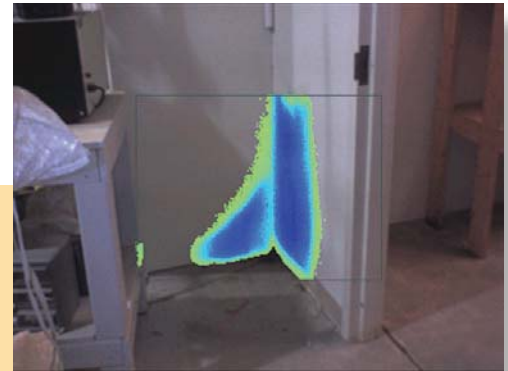


**Moisture detection:** Accurately detect moisture behind interior walls, in ceilings, and under carpets.

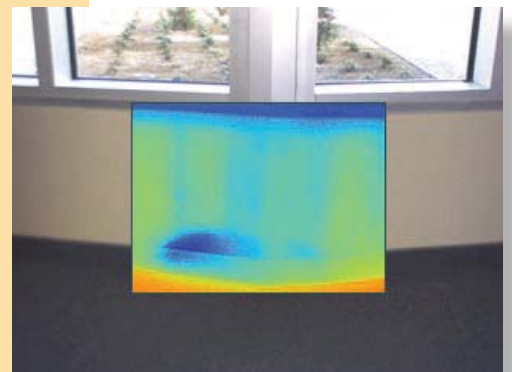

**Mold remediation:** Control mold by revealing undetected sources of moisture

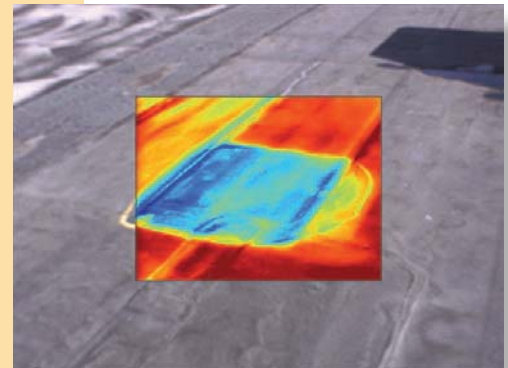

**Roofing:** Detect water-saturated insulation in flat-roof systems to locate damaged portions of roofing structure.

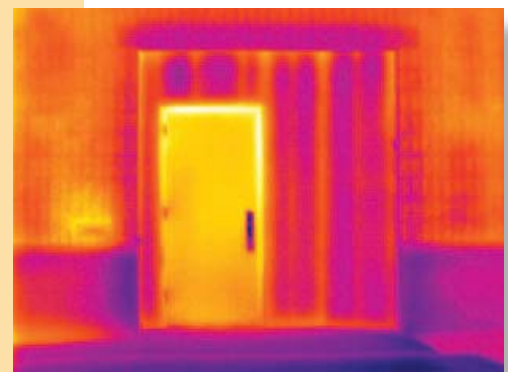

**Energy audits:** Perform residential and commercial energy audits by scanning for heating or cooling (energy) loss, moisture invasion, and HVAC/R problems.





# IR-Fusion® Technology\*



**See things both ways—Infrared and visual (visible light) images fused together communicating critical information faster and easier—traditional infrared images are no longer enough.**


Patent-pending IR-Fusion Technology, pioneered by Fluke, simultaneously captures a digital photo in addition to the infrared image and fuses it together taking the mystery out of IR image analysis.

Images enhanced with IR-Fusion help identify and locate problems enabling repairs to be done right the first time.

IR-Fusion images are also extremely effective when communicating findings to a customer, insurance company or the person who will be performing the repairs.




\*Patent-pending IR-Fusion Technology from Fluke links the infrared image to full visual (visible light) image automatically. No need to carry a digital camera or spend additional time and energy to manage the infrared and visual images. IR-Fusion links the two together so image management is effortless.

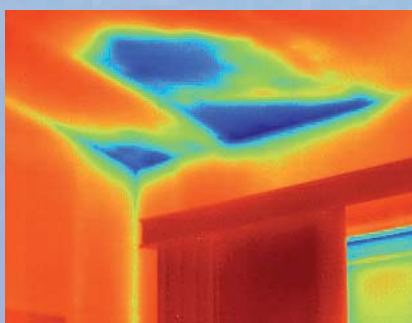

**Full (traditional) IR** Full screen infrared view for maximum infrared detail.


## IR-Fusion - Multiple viewing modes

Identify problems quickly using different on-screen modes— the user selects the mode that works best for each situation. While some viewing modes are not included in every model, all are available for viewing and analysis in the included free SmartView™ software.

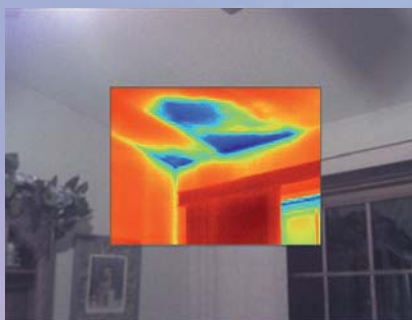


### Picture-in-Picture

Creates an IR "window" surrounded by a visual (visible light) frame to easily identify problems, while maintaining a frame of reference with surroundings.

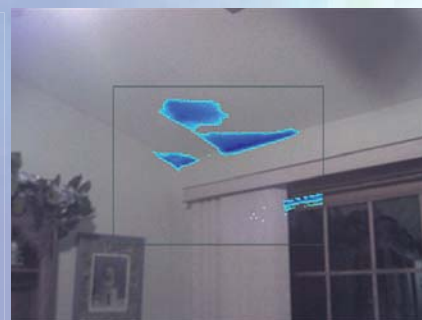

### IR/visible alarm

For displaying only temperatures that fall above, below, or in between a specified range as IR image, leaving the rest of the scene as a fully visible light image.

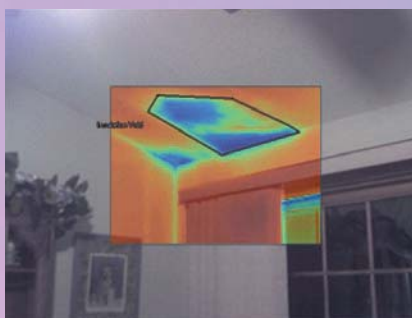

### Alpha/Automatic Blend

A blend of the visual (visible light) and infrared image together to create a single image for optimal viewing. Easy menu options give you access the different blending options from full thermal image to full visual image. Automatic blend provides enhanced detail to help locate problems precisely along with a visual frame of reference and helps to better focus the image.



**Full visible light** – A bright, detailed pixel-for-pixel reference image of subject areas for documentation and reporting.

# Fluke TiR1/R Thermal Imagers



## Optimized for building envelope inspection, restoration and remediation and roofing applications.

The new Fluke TiR1 and TiR Thermal Imagers are the perfect imagers for any building application.

- Enhanced problem detection and analysis capabilities with patent-pending IR-Fusion® Technology – only available from Fluke.
- Optimized for tough environments
  - Engineered and tested to withstand a 2 meter (6.5 foot) drop
  - Withstands dust and water—tested to an IP54 rating
- Delivers the clear, crisp images needed to find problems fast
  - Identify the smallest temperature differences common in building and roofing applications with their optimized thermal sensitivity (NETD)
- High performance, low noise sensor provides high quality image and stable temperature reading
- Even the smallest details become visible with the large, widescreen full color LCD display
- Intuitive, three-button menu is easy to use ... simply navigate with the push of a thumb.
- No need to carry pen and paper—record findings by speaking into the camera— voice annotation comments are saved with the image. (TiR1 only)
- Store more than 3,000 screen images (.bmp format) or 1,200 IR-Fusion images on included 2 GB SD memory card.



# Fluke TiR1/R specifications

	Fluke TiR1	Fluke TiR
Imaging performance		
Field of View (FOV )	23° horizontal x 17° vertical	
Minimum focus distance	Thermal lens: 15 cm (approx. 6 in), Visible (visual) light lens: 46 cm (approx. 18 in)	
Thermal sensitivity (NETD)	≤ 0.07 °C at 30 ° C (70 mK)	≤ 0.1 °C at 30 ° C (100 mK)
Minimum span (Auto/Manual)	5 °C / 2.5 °C	5 °C / 2.5 °C
Focus	Manual	
Detector size	160 x 120	
On camera operating modes	Picture-in-Picture (Blending is user selectable between MAX, MID and MIN) and full screen IR (Blending is user selectable between MAX, MED and MIN)	Full Picture-in-Picture and full screen IR
Visual (Visible light) camera	640 x 480 pixels, full color	
Temperature measurement		
Temperature range	-20 °C to +100 °C (-4 °F to +212 °F), 2 ranges	-20 °C to +100 °C (-4 °F to +212 °F)
Accuracy	± 2 °C or 2 % (whichever is greater)	± 5 ° C or 5 % (whichever is greater)
Measurement modes	Center point and hot and cold markers	Center point
On-screen emissivity correction	Yes	No
Image presentation		
Digital display	9.1 cm (3.6 in) diagonal landscape color VGA (640 x 480) LCD	
LCD backlight	Selectable bright or auto	
Palettes	Ironbow, blue-red, high contrast, amber, hot metal, grey	Ironbow, blue-red, high contrast, grey
Image and data storage		
Fully radiometric	Yes	
Storage medium	2 GB SD card stores up to 3000 .bmp IR images or 1200 .IS2 IR-Fusion images	
File formats supported	Exportable to JPEG, BMP, GIF, PNG, TIFF, WMF EXIF, and EMF	
Voice memo recorder (voice annotation)	Yes	No
Software Controls and adjustments		
Software	SmartView ; Full analysis and reporting software included	
Set-up controls	Date/time, °C/°F, language, emissivity, hot spot and cold spot on image	Date/time, °C/°F, language
Language selection	English, German, French, Spanish, Portuguese, Italian, Swedish, Finnish, Russian, Czech, Polish, Turkish, Simplified Chinese, Traditional Chinese, Korean, Japanese	
Image controls	Smooth auto scaling and manual scaling	
On-screen indicators	Battery status, real time clock and center point temperature, range and span indication and high and low alarm settings	
Power		
Battery type	Internal rechargeable battery (included)	
Battery operating time	3 to 4 hours continuous operation	
Battery charging	2 hours with ac charger or dc car charger (charges battery while operating)	
AC operation	AC adapter/charger 110/230 V ac, 50/60 Hz	
Power saving	Automatic shutdown and sleep modes (user specified)	
Environmental and mechanical design		
Operating temperature	-10 °C to +50 °C (+14 °F to +122 °F)	
Storage temperature	-20 °C to +50 °C (-4 °F to +122 °F)	
Relative humidity	Operating and storage 10 % to 90 %, non-condensing	
Water and dust resistant	IP54	
Two meter (6.5 feet) drop test	Yes	
Protective lens cover	Yes	
Weight (including battery)	1.2 kg (2.6 lbs)	
Imager size (HxWxD)	267 mm x 127 mm x 152 mm (10.5 in x 5.0 in x 6.0 in)	
Other		
Warranty	Two-years	
EN 61010-1 2nd edition and EN61326-1	Yes	