



Model 1297 BNC (Female) To Standard 1/4" Two Conductor Phone Plug

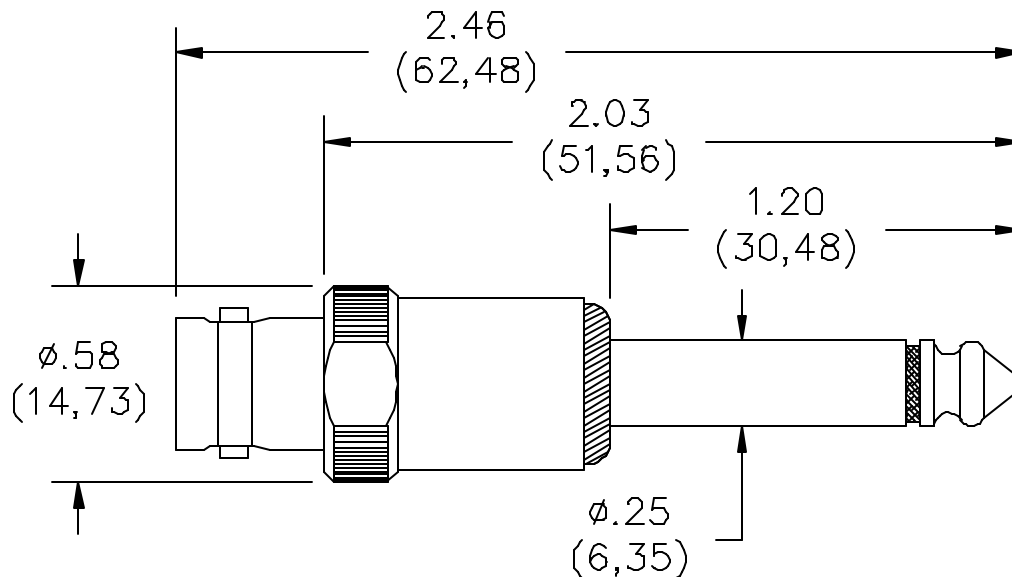

SCHEMATIC

FEATURES:

- Enables interconnection between telephone equipment and BNC based test instruments.
- Readily adapters standard phone jacks for BNC Cables.
- BNC (Female) contact is gold plated Beryllium Copper for noise free connection.
- Adapter is tarnish resistant for good lab appearance.

MATERIALS:

BNC (Male): Body – Brass, Tarnish Resistant
Center Contact: Beryllium Copper, Gold Plated
Dielectric: PTFE
Handle: Brass, Nickel Plated
Phone Plug (Two Conductors): Brass, Nickel Plated

RATINGS:

Operating Voltages: 500 VRMS
Operating Temperature: +125°C (+257°F)
Impedance: 50 Ohms

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

ORDERING INFORMATION: Model 1297

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02$ " (.51 mm), .xxx = $\pm .005$ " (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA