





Model 2390 Size A Aluminum Box With Cover BNC Female/Female

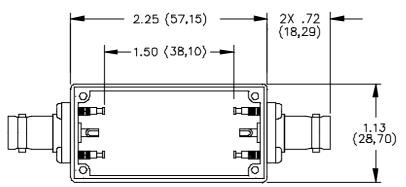



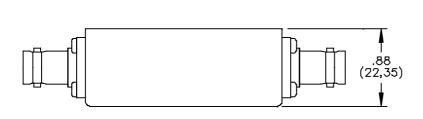



MATERIALS:

Connector: BNC Receptacle

Body: Tarnish Resistant Plating, Center Contact: Male - Gold Plated Brass, Female - Gold Plated Beryllium Copper

Solder Turret Terminal Screws: Steel, 4 ea. #4-40

Shielded Housing: Die cast aluminum alloy A380 or A384

Finish: Blue paint per Federal Standard 595 #25109 over Phosphoric Etch

Cover: .040 Thick aluminum #1100-H14

Finish: Clear Anodized

Screws: Steel 4 ea. #2-32 x 1/4" Pan Head, self-tapping.

RATINGS:

Operating Voltage: Inner conductor/shield: 335 VRMS Max.

Operating Temperature: -55°C to +150°C

Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 2390

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 SY/EH/LS Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 Pomona*ACCESS* **90141** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

S:\Engineering\Release\DataSheets\FlukeDataSheet\d2390_1_01.doc