





## **Model 2411** Size B Aluminum Box With Cover Type N Male To Female

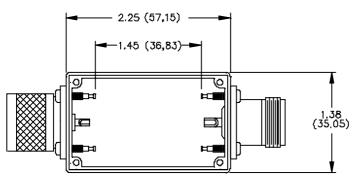



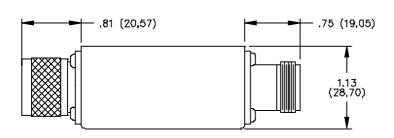



## **MATERIALS:**

Connector: Type "N" Male & Type "N" Female

Body: Tarnish Resistant Plating, Center Contact: Male – Gold Plated Brass, Female – Gold Plated Beryllium Copper

Solder Turret Terminal Screws: Steel

Shielded Housing: Die cast aluminum alloy 380 or 384.

Finish: Blue baked enamel per Fed. Std. 595 25109 over primer wash

Cover: 1.02 (.040) thick aluminum #1100-H14

Finish: Clear anodized

Screws: 4 each #2-32 x (1/4"). Pan head self-tapping. Steel.

Finish: Blue zinc plated.

Marking "Pomona 2411"

## **RATINGS:**

Operating Voltage: Inner conductor/Shield: 1000 VRMS Max.

Operating Temperature: -55°C to +150°C

Nominal Impedance: 50 Ohms

**ORDERING INFORMATION:** Model 2411

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 S:\Engineering\Release\DataSheets\FlukeDataSheet\d2411\_1\_01.doc

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060

PomonaACCESS 90150 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com