





PEWA
 Messtechnik GmbH
 Weidenweg 21
 58239 Schwerte
 Tel.: 02304-96109-0
 Fax: 02304-96109-88
 E-Mail: info@pewa.de
 Homepage : www.pewa.de

Model 2447 & 2447A
Connector BNC (M), Panel
Mount **CE**

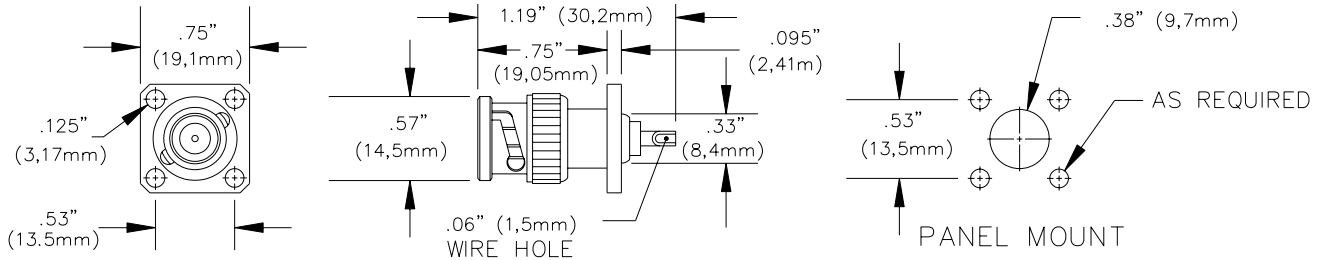

2447

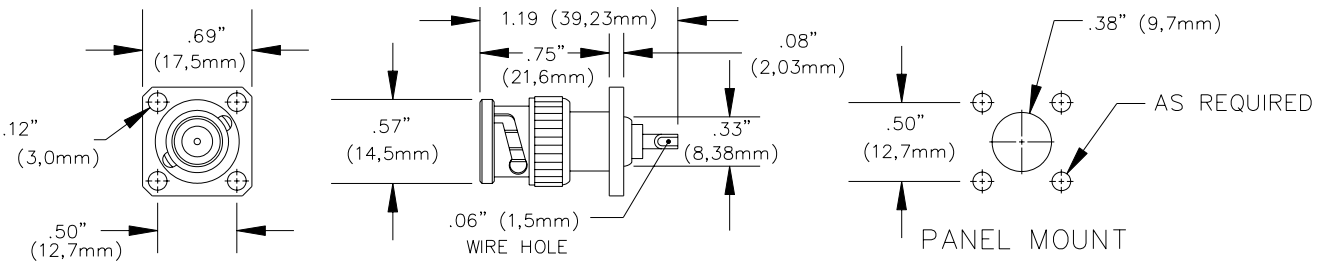

2447A

FEATURES:

- ✓ Model **2447** features .531 (13,5mm) Hole Spacing
- ✓ Model **2447A** features .500 (12,7mm) Hole Spacing

MATERIALS:

BNC Body: Nickel Tarnish Resistant Plated Brass
 Center Contact: Gold Plated Brass
 Center Contact – Gold over Nickel.
 Dielectric: PTFE
 Gasket: Silicone Rubber



RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 500 Vrms maximum. *For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.*
 Operating Temperature: -85°F to 329°F (-65°C to +165°C)
 Nominal Impedance: 50 Ohms

ORDERING INFORMATION:

Model: 2447 (.531" Mounting Hole Spacing)
 Model: 2447A (.500" Mounting Hole Spacing)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com