


## Technical Data Sheet

# Model 2BC-MG Double Banana Plug to Minigator Test Clip Breakouts

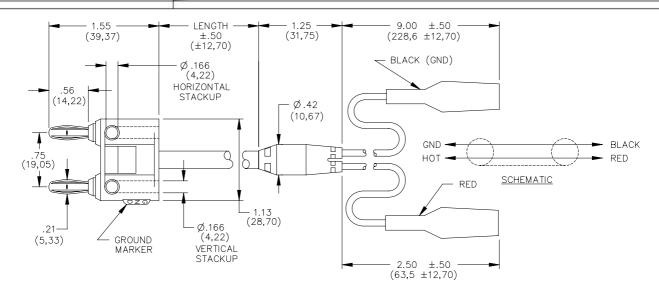

#### **Features**

- Jaws open to .187" Max.
- Ideal for use with Pomona Model 2269 or any standard double Banana Jack.
- Allows connection from a Double Banana Binding Post to Alligator Clips.

#### **Materials**

Double Banana Plug:

Spring: Nickel plated Beryllium Copper. Body: Nickel plated brass Alloy 360 ½ hard. Insulator: Polypropylene, color matches cable

Cable: RG 58C/U

Breakout: Molded PVC, color matches cable

Breakout Leads: 20 AWG. 41 x 36 T.C. PVC insulated .087 inch O.D., Color: one Black, one Red

Miniature Alligator Clips: Plated steel, vinyl insulator, color matches wire

### **Ratings**

Operating Voltage: 45 VRMS

Operating Temperature: +50°C (+122°F) Max.

Cable Capacitance: 30.8 pf/ft
Cable Impedance: 50 Ohms nominal

## **Ordering Information**

Model: 2BC-MG-36

Standard cable length is 36" (914).

Additional lengths can be quoted upon request.

**USA:** Sales: 800-490-2361

Technical Support: <a href="mailto:technicalsupport@pomonatest.com">technicalsupport@pomonatest.com</a>

Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.