


PEWA Messtechnik GmbH

Weidenweg 21 58239 Schwerte

Tel.: 02304-96109-0 Fax: 02304-96109-88 E-Mail: info@pewa.de Homepage: www.pewa.de

## Model 3073 BNC (Female to Multi-Stacking Banana Plugs

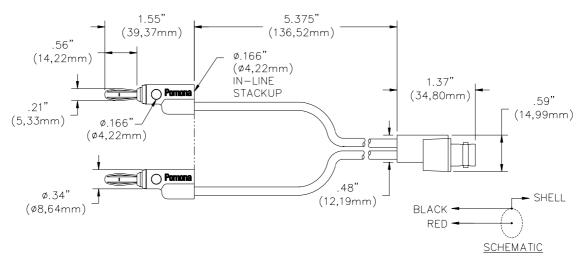

## **FEATURES:**

- Converts BNC cables with male plugs to stackable banana plugs for versatility
- BNC connector and banana plugs are molded directly to the wire for pull strength durability and dust and moisture resistance
- BNC center contact is gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life

## **MATERIALS:**

BNC: Nickel plated brass

Center Contact: Gold plated Beryllium Copper

Wire: 18 AWG, PVC

Marking: "Pomona 3073" Banana Plugs: Nickel plated brass

Spring: Nickel plated Beryllium Copper Insulation: Polypropylene, red and black

## **RATINGS:**

Operating Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 500 WVDC Max.

Operating Temperature: +55°C (+131°F) Max. **ORDERING INFORMATION:** Model 3073

Custom lengths are available, contact Pomona Technical support: 800-241-2060

(Technical support@pomonatest.com)

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 100 D1093983 Page 1 of 1