




**PEWA**  
 Messtechnik GmbH  
 Weidenweg 21  
 58239 Schwerte  
 Tel.: 02304-96109-0  
 Fax: 02304-96109-88  
 E-Mail: info@pewa.de  
 Homepage : www.pewa .de

**Model 3230**  
**Size B Aluminum Box With Cover**  
**BNC Female/Female**

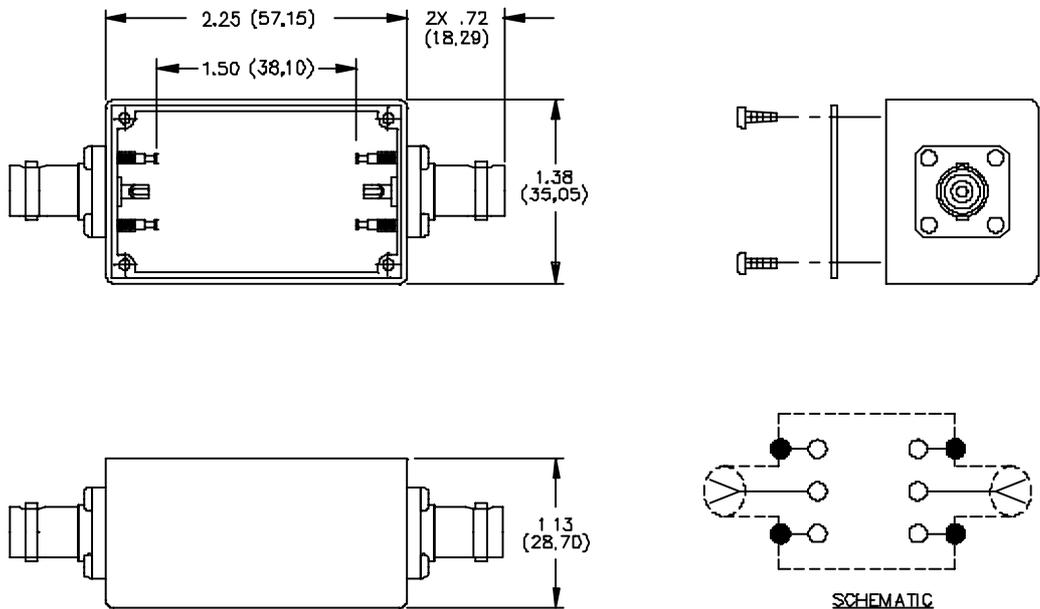

**MATERIALS:**

- Connector: BNC (F)
- Body: Tarnish Resistant Plating, Gold Plated Beryllium Copper,
- Solder Turret Terminal Screws: Steel
- Shielded Housing: Die cast aluminum alloy A380 or A384.
- Finish: Blue paint per Federal Standard 595 #25109 over Phosphoric Etch
- Cover: .040 thick aluminum 1100-H14
- Finish: Clear anodized
- Screws: 4 each #2-32 x 1/4" Pan Head self-tapping. Steel.

**RATINGS:**

- Operating Voltage: Inner conductor/Shield: 500 VRMS Max.
- Operating Temperature: -55°C to +150°C
- Nominal Impedance: 50 Ohms

**ORDERING INFORMATION: Model 3230**

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies. Made in USA

6/9/99  
 SY/EH/LS  
 S:\Engineering\Release\DataSheets\FIukeDataSheet\3230\_1\_01.doc

**Sales: 800-490-2361 Fax: 888-403-3360**  
**Technical Assistance: 800-241-2060**

PomonaACCESS 90165 (800) 444-6785 or (425) 446-6010  
 More drawings available at www.pomonaelectronics.com  
 Page 1 of 1