



PEWA Messtechnik GmbH


Weidenweg 21 58239 Schwerte

Tel: 02304-96109-0 Fax: 02304-96109-88 E-Mail: info@pewa.de Homepage : www.pewa .de

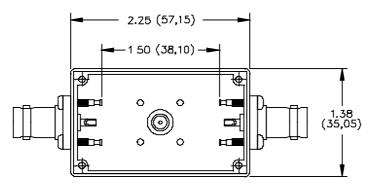

**Model 3232** Size B Aluminum Box With Cover **BNC Female Tee** 



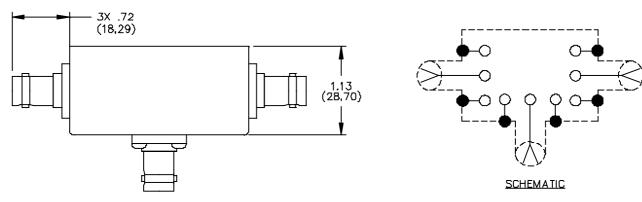

## **MATERIALS:**

Connector: BNC (F)

Body: Tarnish Resistant Plating, Gold Plated Beryllium Copper,

Solder Turret Terminal Screws: Steel

Shielded Housing: Die cast aluminum alloy A380 or A384.

Finish: Blue paint per Federal Standard 595 #25109 over Phosphoric Etch

Cover: .040 thick aluminum 1100-H14

Finish: Clear anodized

Screws: 4 each #2-32 x 6.35 (1/4") Pan Head self-tapping. Steel.

## **RATINGS:**

6/9/99

SY/EH/LS

Operating Voltage: Inner conductor/Shield: 500 VRMS Max.

Operating Temperature: -55°C to +150°C

Nominal Impedance: 50 Ohms

## **ORDERING INFORMATION:** Model 3232

All dimensions are in inches. Tolerances (except noted):  $xx = \pm .02^{\circ}$  (.51 mm),  $xxx = \pm .005^{\circ}$  (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 S:\Engineering \Release \DataSheets \FlukeDataSheet\d3232\_1\_01.doc

PomonaACCESS 90167 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com Page 1 of 1