


## Model 3287 Adapter UHF (Female) To BNC (Male)

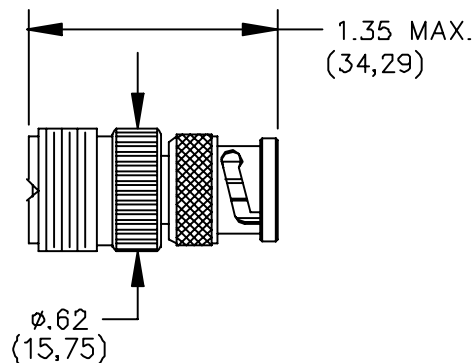

### MATERIALS:

Body and Fittings:

Shell - Brass, Tarnish Resistant Plating

Center Contact - Gold Plated Phosphor Bronze

Dielectric - PTFE

### RATING:

Operating Voltage: Shield/Earth: 30VAC/60VDC Max.

Inner Conductor/Shield: 500VRMS Max.

Operating Temperature: -55°C to +85°C (-67°F) (+185°F)

Nominal Impedance: Non-Constant Impedance.

### ORDERING INFORMATION: Model 3287

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

10/11/00

SY/EH/LS

S:\Engineering\Release\DataSheets\FlukeDataSheet\d3287\_1\_01.doc

**Sales: 800-490-2361 Fax: 888-403-3360**

**Technical Assistance: 800-241-2060**

Last saved by PN

PomonaACCESS **90183** (800) 444-6785 or (425) 446-6010

More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 1