


## Model 3296 Adapter, Miniature Binding Posts To BNC Male

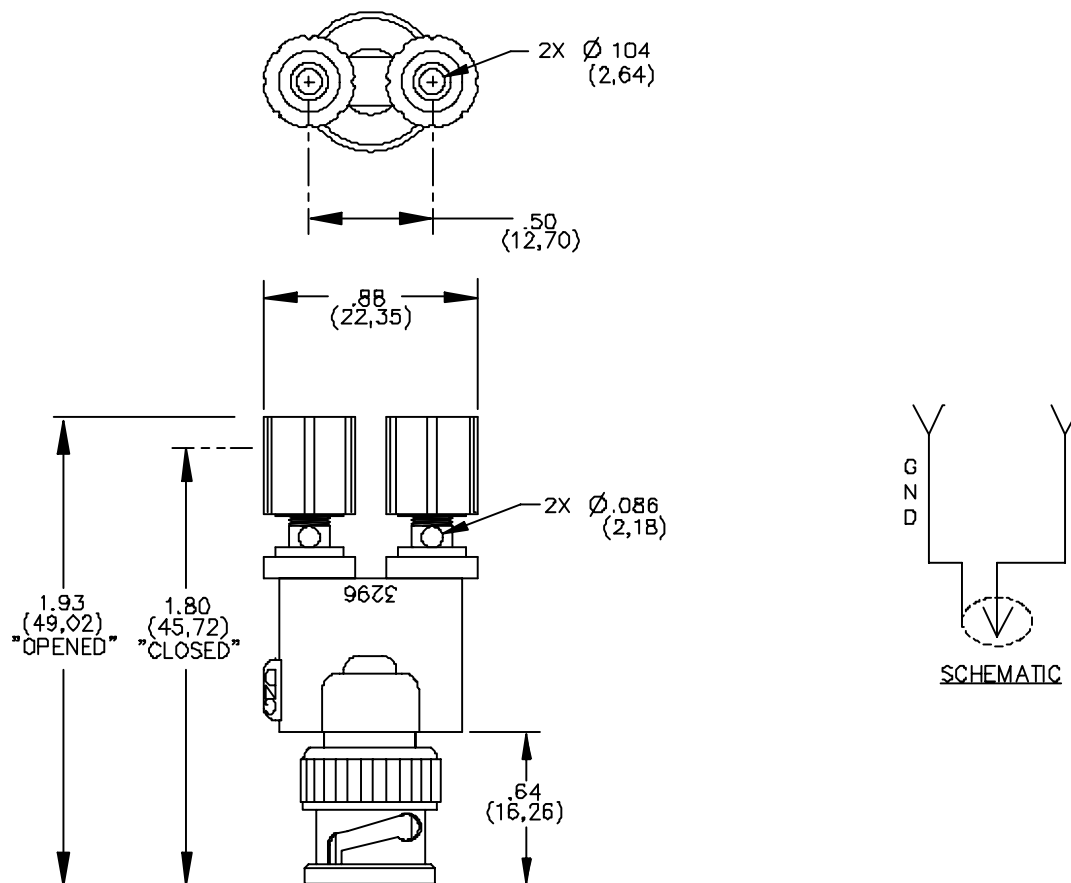

### MATERIALS:

Body: Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass  
Marking: "Pomona 3296"

### RATINGS:

Operating Voltage: Shield/Earth: 30VAC/60VDC Max.  
Inner conductor/Shield: 500VRMS Max.  
Operating Temperature: +50°C. (+122°F.) Max.

### ORDERING INFORMATION: Model 3296

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).  
All specifications are to the latest revisions. Specifications are subject to change without notice.  
Registered trademarks are the property of their respective companies.

Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FIukeDataSheet\3296\_1\_01.doc

Sales: 800-490-2361 Fax: 888-403-3360  
Technical Assistance: 800-241-2060

PomonaACCESS 90761 (800) 444-6785 or (425) 446-6010  
More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 2

# Pomona®

## **Model 3296 Adapter, Miniature Binding Posts To BNC Male**

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02$ " (.51 mm), .xxx =  $\pm .005$ " (.127 mm).  
All specifications are to the latest revisions. Specifications are subject to change without notice.  
Registered trademarks are the property of their respective companies.

Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FlukeDataSheet\3296\_1\_01.doc

**Sales: 800-490-2361 Fax: 888-403-3360**

**Technical Assistance: 800-241-2060**

PomonaACCESS **90761** (800) 444-6785 or (425) 446-6010  
More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 2 of 2