


PEWA Messtechnik GmbH

Weidenweg 21 58239 Schwerte

Tel.: 02304-96109-0 Fax: 02304-96109-88 E-Mail: info@pewa.de Homepage : www.pewa .de Model 3533 Adapter BNC Male To Male

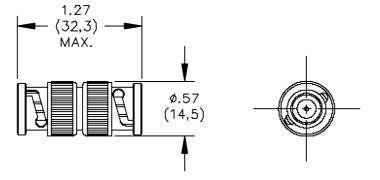

MATERIALS:

Body – Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass Dielectric: PTFE Finish: Body and Fittings – Tarnish Resistant Center Contact – Gold Plated Marking: "Pomona 3533"

RATING:

Operating Voltage: Shield/Earth: 30VAC/60VDC Max. Inner Conductor/Shield: 500VRMS Max. Operating Temperature: -65°C to +165°C Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 3533

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 S/28/02 SY/EH/LS
 Sales: 800-490-2361 Fax: 888-403-3360

 Last saved by PN
 Technical Assistance: 800-241-2060

 S:\Engineering!Release!DataSheets\FlukeDataSheets\GataSheet\d3533_1_02.doc

PomonaACCESS 90190 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com