





PEWA
 Messtechnik GmbH
 Weidenweg 21
 58239 Schwerte
 Tel.: 02304-96109-0
 Fax: 02304-96109-88
 E-Mail: info@pewa.de
 Homepage : www.pewa.de

Model 3602
Shielded Housing, Size "D",
BNC Female Both Ends

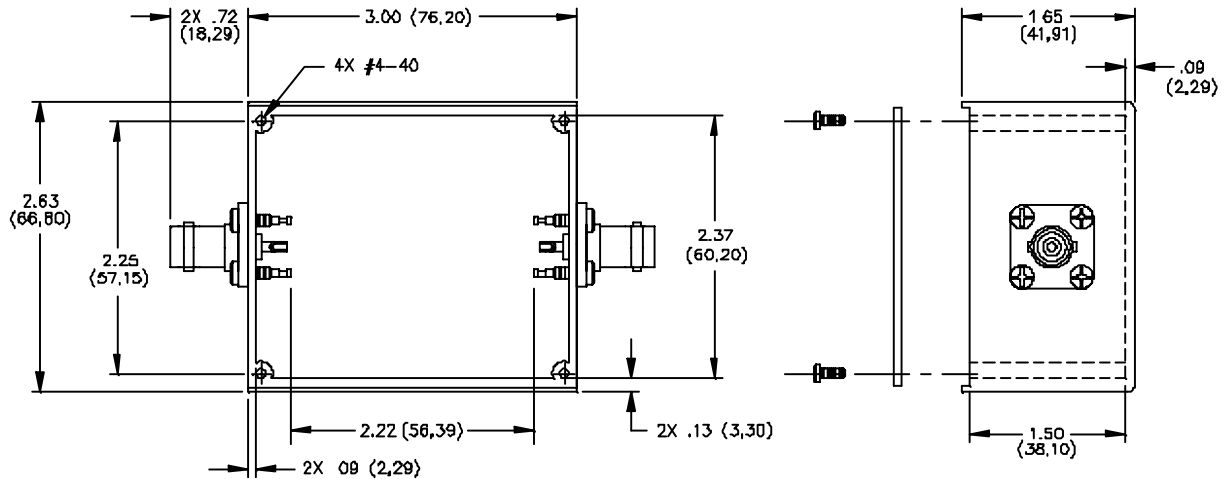

SCHEMATIC

MATERIALS:

Connector: 2 each BNC Female

Finish:

Body and Fittings – Tarnish resistant

Center Contact – Gold plated

Nominal Impedance: 50 Ohms.

Solder Turret Terminal Screws: 4 each, 4-40 pan head. Material: Steel.

Shielded Housing: Die cast aluminum Alloy A380 or A384.

Finish: Blue baked enamel per Federal Standard 595 #25109 over primer wash per DOD-P-15328.

Cover: 1.60 (.063) thick aluminum 1100-H14

Finish: Clear anodized

Screws: 8 each, #4-40 x 6.35 (1/4) with blue zinc plating.

RATINGS:

Operating Temperature: +150°C. (+302°F.) Max.

ORDERING INFORMATION: Model 3602

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FlukeDataSheet\3602_1_01.doc

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

PomonaACCESS 90196 (800) 444-6785 or (425) 446-6010

More drawings available at www.pomonaelectronics.com

Page 1 of 1