


Weidenweg 21 58239 Schwerte Tel.: 02304-96109-0 Fax: 02304-96109-88 E-Mail: info@pewa.de Homepage : www.pewa.de

PEWA Messtechnik GmbH

Technical Data Sheet

Model 3840 Adapter, BNC (Male), Resistor Termination

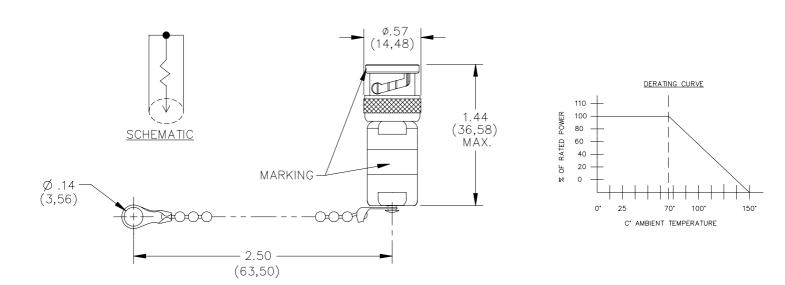

Features:

- Reliable termination at known resistance value ± 1%
- Gold plated contacts for high conductance
- Tarnish resistant plating on body

Materials:

Body: Brass, Center Contact: Gold plated brass

Outer Contact: Tarnish Resistant gold plated Beryllium Copper.

Dielectric: Teflon

Gasket/Seals: Silicone rubber

Resistor: Deposited carbon film Marking: "Pomona 3840" Label: "TERM, *Ω 1/2W"

Sales: Technical Support: 800-490-2361 800-241-2060

 Fax:
 or e-mail us at

 888-403-3360
 technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

Ratings:

Frequency Range: DC to 500 MHz

Resistance Tolerance: ± 1% Power: 1/2W @ 70°C Max

ORDERING INFORMATION: Model 3840-*

*= Resistance Value 50, 75, 93, 100, 600 Ordering Example: 3840-50 = 50 Ohms

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02"$ (,51 mm), $.xxx = \pm .005"$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.