




PEWA  
Messtechnik GmbH  
Weidenweg 21  
58239 Schwerte  
Tel.: 02304-96109-0  
Fax: 02304-96109-88  
E-Mail: info@pewa.de  
Homepage : www.pewa .de

## Model 4295 Adapter, SMA Female TNC Female

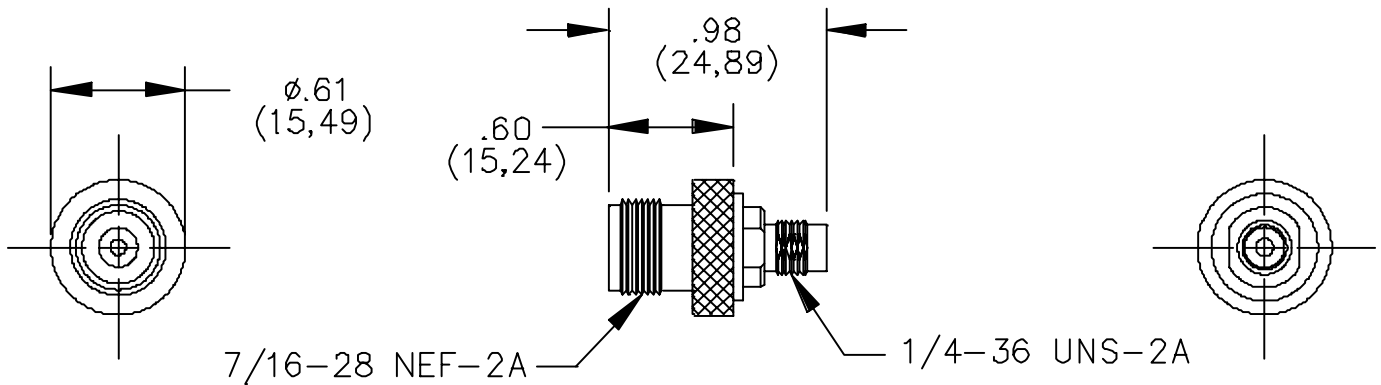

### MATERIALS:

Body: Gold Plated Beryllium Copper, Center Contacts: Gold Plated Beryllium Copper  
Finish: Body and Contact – Gold plated per MIL-G-45204, Type II, class 2.  
Marking: “Pomona 4295”

### RATINGS:

Voltage: Shield/Earth: 30VAC/60VDC Max.  
Inner Conductor/Shield: 335VRMS Max.  
Nominal Impedance: 50 Ohms  
Frequency Range: 0-12.4 GHz.  
Operating Temperature: -65°C (-85°F) to +165°C (+329°F)

### OPERATING INFORMATION: Model 4295

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).  
All specifications are to the latest revisions. Specifications are subject to change without notice.  
Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EH/LS

S:\Engineering\Release\DataSheets\FlukeDataSheet\4295\_1\_01.doc

Sales: 800-490-2361 Fax: 888-403-3360  
Technical Assistance: 800-241-2060

PomonaACCESS 90252 (800) 444-6785 or (425) 446-6010  
More drawings available at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

Page 1 of 1