


Model 4958
Twinaxial, BNC, Receptacle,
Bulkhead

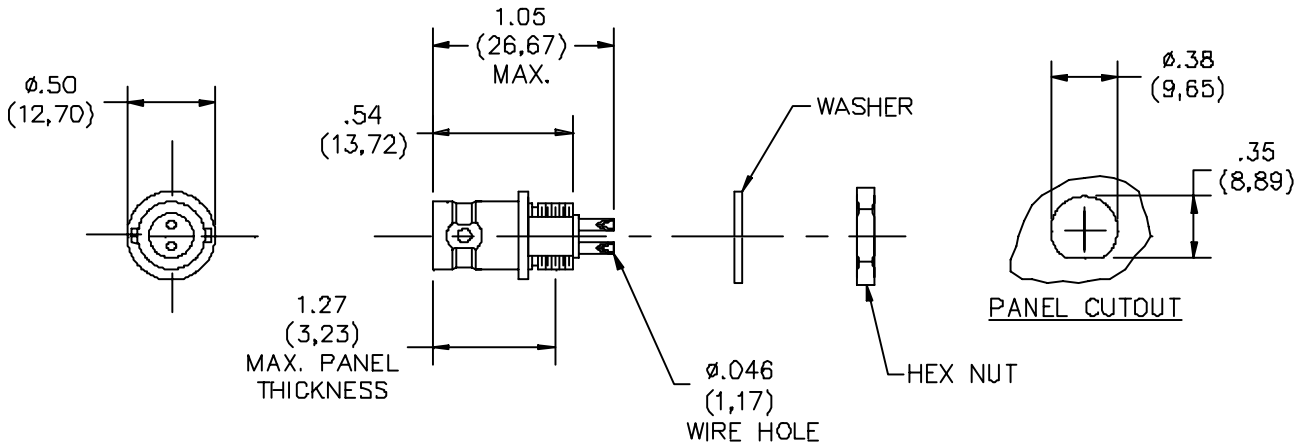

MATERIALS:

Body: Brass, Tarnish Resistant Plating
 Alloy 360, 1/2 Hard or Phosphor Bronze
 Male Contact: Gold Plated Brass
 Female Contact: Gold Plated Beryllium Copper
 Dielectric: PTFE
 Finish:
 Body and Fittings: Tarnish resistant
 Male and Female Contact – Gold plated
 Marking: “POMONA 4958”

RATINGS:

Operating Temperature: -65°C (-85°F) to +165°C (+329°F)
 Operating Voltage: 500 VRMS Max.
 Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 4958

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies.

Made in USA