
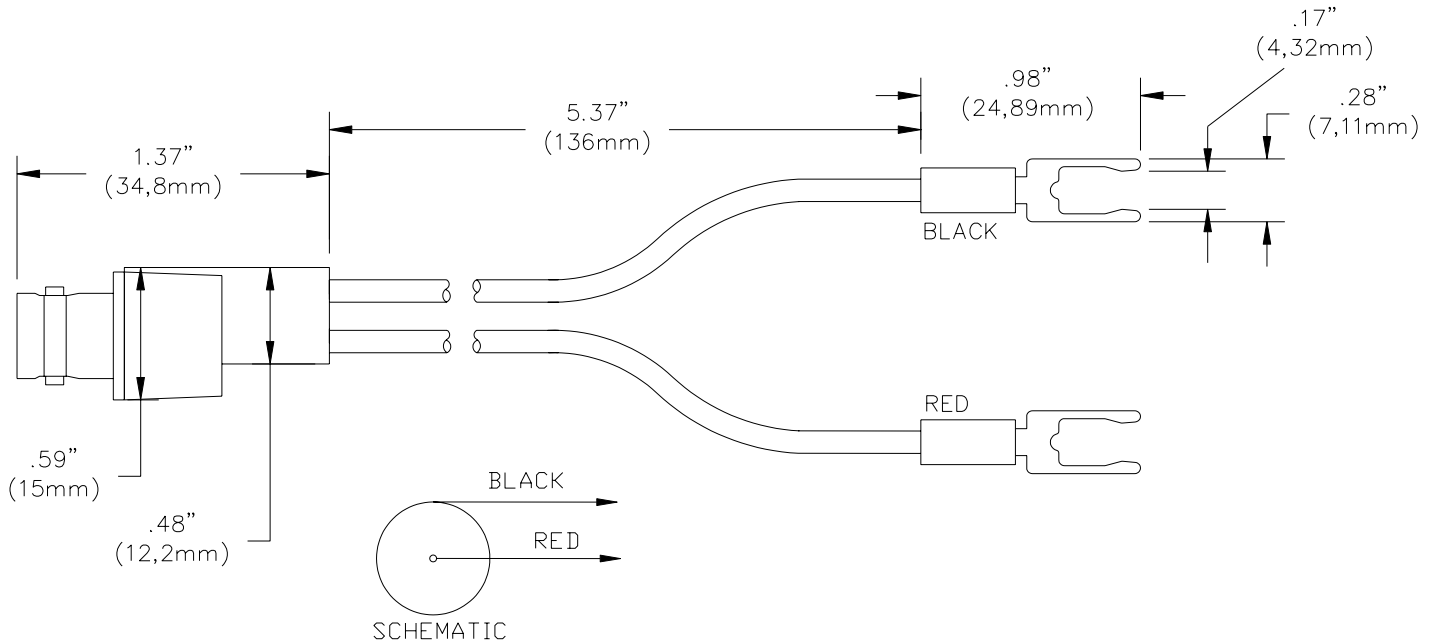


**Model 5051**  
**Breakout: BNC (Female) To**  
**#8 Spade Lugs**

**FEATURES:**

- ✓ Converts BNC (male) cables / connectors to a #8 spade lug connector for terminal strip attachment.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ BNC shell is tarnish resistant.
- ✓ BNC center contact is gold plated Beryllium Copper for excellent electrical connection.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

**MATERIALS:**

*BNC:* Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper

*Dielectric:* PTFE

*Wire:* 20 AWG, PVC

*#8 Spade Lug:* Tin-plated copper alloy

*Lug Insulation:* Vinyl, color matches color of wire

**RATINGS:**

Operating Voltage: Hands free testing in controlled voltage environments: 500VRMS Max.

Operating Temperature: +131°F (+55°C) Max.

**ORDERING INFORMATION:** Model 5051

\* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060  
For "Where to Buy" information, visit the Pomona web site at [www.pomonaelectronics.com](http://www.pomonaelectronics.com)