


PEWA Messtechnik GmbH

Weidenweg 21 58239 Schwerte

Tel.: 02304-96109-0 Fax: 02304-96109-88 E-Mail: info@pewa.de Homepage: www.pewa.de

Model 5423 BNC Male With Molded Strain Relief To Minipincer® Test Clips

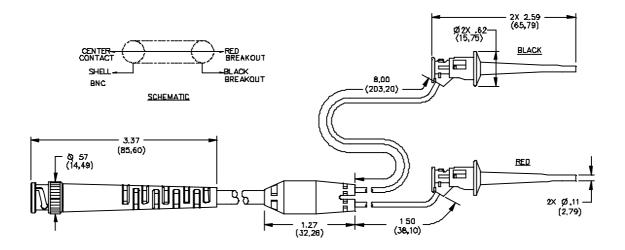

FEATURES:

• Convert a BNC Female receptacle into Minipincer® Test Clips

MATERIALS:

Conn: 1st End - Minipincer® Test Clips. Selectively gold plated Beryllium Copper contact.

Insulation: Nylon

Color: One Black and one Red

Cable: RG58C/U, 5.0 (.195) O.D.; Y-Mold insulation, PVC, Black Conn: 2nd End – Crimp BNC Male – Brass body, tarnish resistant plated.

Center Contact: Brass, gold plated

Boot: PVC, Black

Marking: "POMONA 5423"

RATINGS:

Operating Temperature: +50° (+122°F) Max.

Operating Voltage: 300 VRMS Max.

Current: 5 Amperes

ORDERING INFORMATION: Model 5423-C-XX

XX= Cable Length, Standard Length: 18" (457), 24" (610), 36" (914), 48" (1219), 60" (1542)

Ordering Example: 5423-C-60 indicates 60" in length.

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02^{\circ}$ (,51 mm), $.xxx = \pm .005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99 SY/EH/LS Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060

Pomona*ACCESS* **90641** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

C:\Laura Goldberg\FlukeDataSheet\d5423_1_01.doc

Page 1 of 1