

Weidenweg 21 58239 Schwerte Tel.: 02304-96109-0 Fax: 02304-96109-88 E-Mail: info@pewa.de Homepage : www.pewa.de


Messtechnik GmbH

PEWA

# Technical Data Sheet

## Model 5519A

IEC61010 Compliant Replacement Test Leads for Sheathed Style DMM's

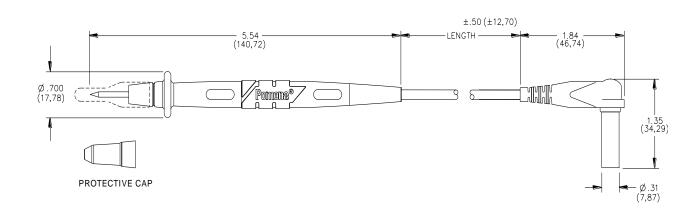

## FEATURES

- Designed for Fluke, H-P, Tektronix and Wavetek DMM's with a safety of sheathed banana jack.
- Probe body incorporates a two step mold process. First step is Polypropylene for probe rigidity. Second step is Santoprene® rubber for handling comfort, added insulation protection and wire strain relief.
- Probe test leads are designed with over-voltage spike protection of up to 6kV.
- Probe body inner insulation is fire retardant Polypropylene for added safety.
- Probe body and banana plug are molded directly to the wire for robust pull strength.
- Wire is a high strand count silicone wire for extreme flexibility and high temperature resistance.
- Wear indication with double insulated (dual extruded) silicone leads shows white inner layer for increased safety.
- Banana plug spring is nickel plated Beryllium Copper for long insertion life.

#### MATERIALS

Probe body: Outer Insulation – Santoprene® Rubber, Color: Gray Inner Insulation – Polypropylene, Fire Retardant, Color: One Black, One Red Tip – Nickel plated brass
Wire: 18 AWG, 192 x 41 bare copper, Silicone Insulation, O.D. 0.144" (3,66mm). Length: 48" (122cm)
Banana Plug: Body – Brass, Nickel Plated Spring – Beryllium Copper, Nickel Plated
Insulation – PVC, Color: One Black, One Red

### RATINGS

Operating Voltage: IEC 61010-031, CAT III, 1000 V (with protective cap), CAT II 1000 V (without protective cap). Current: 10 Amperes

## **ORDERING INFORMATION**

Model 5519A Includes a set of one black and one red test lead.

USA: Sales: 800-490-2361 Technical Support: technicalsupport@pomonatest.com Fax: 425-446-5844 Europe: 31-(0) 40 2675 150 International: 425-446-5500 Where to Buy: www.pomonaelectronics.com



All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02"$  (,51 mm),  $.xxx = \pm .005"$  (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.