

Messtechnik GmbH Weidenweg 21 58239 Schwerte Tel.: 02304-96109-0 Fax: 02304-96109-88


E-Mail: info@pewa.de Homepage : www.pewa .de

PEWA

Technical Data Sheet

Model 6718

Dual Output, 75 Ohm BNC Circuit Board Mount, White Valox Case

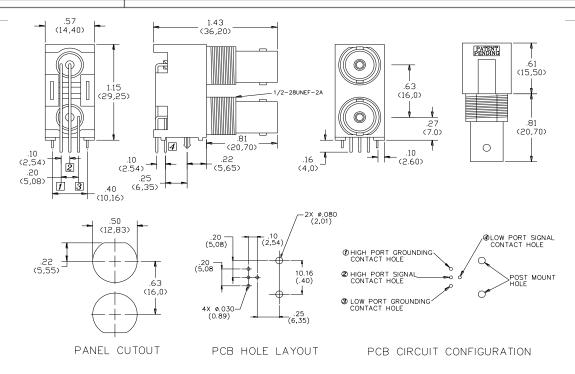

Materials

Case: BNC Body: Center Contact Pin: Center Contact Socket: Insulator: White Vaolox Nickel Plated Brass Gold Plated Brass Gold Plated Phosphor Bronze Polybutylene Terephthalate

Ratings

Impedance: 75 Ohm Frequency: 0 – 1 GHz VSWR: 1.30 max Contact Resistance: 3 Milliohms max. Voltage: * 500 V Insulation Resistance: 5000 Megohms min. Insertions: 500 Temperature: -40°C to +85°C (-40°F to +185°F) Shock: 50 G Vibration: 20 G from 80 to 2000 Hz



* Maximum voltage for *hands free use* in controlled testing environments. For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vrms / 42.4 Vpk / 60 Vdc, or current exceeds 8A maximum.

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.