


PEWA Messtechnik GmbH

Weidenweg 21 58239 Schwerte

Tel.: 02304-96109-0 Fax: 02304-96109-88 E-Mail: info@pewa.de Homepage: www.pewa.de

# Model 6727 Patch Cable, Multi-Stacking Sheath Banana Plug

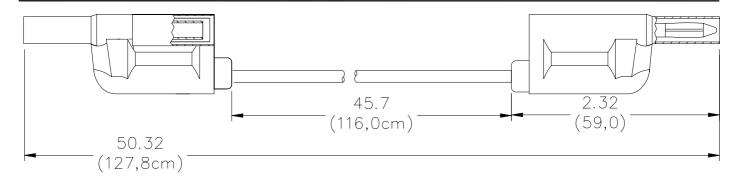

### **Features:**

- ✓ Patch cable can be vertically stacked on top of each other.
- ✓ Complies to International Safety Standard IEC 1010-2-031



### **Materials:**

Banana Jack: Nickel Plated Brass

Banana Plug: Nickel Plated Beryllium Copper

Insulation: Lucel Wire: Silicone

**Ratings:** 

Voltage / Current: 1000 Vrms, CAT III, 20 A, IEC 1010-2-031

Temperature: -10 to +55 C

**Ordering Information:** 

6727-0 Black patch cable 6727-2 Red patch cable

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

# Pomona<sup>®</sup>

## **Model 6727** Patch Cable, Multi-Stacking **Sheath Banana Plug**

The items included with this product are certified to meet IEC 1010-2-031 safety requirements.

Les élements inclus avec ce produit sont certifies pour répondre à des exigences de sûrete du IEC 1010-2-031. Los items incluidos con este producto se certifican para resolver requisitos de seguridad del IEC 1010-2-031.

- Only IEC 1010 type shrouded test plugs should be used with IEC 1010 type jacks. NEVER INSERT A PROBE TIP WITH BANANA SPRING INTO A TEST ACCESSORY JACK THAT WILL BE USED AS A HAND HELD PROBING DEVICE

-Seuls les vérificateurs de tension renforcés de type IEC 1010 devraient être utilisés avec des jacks de type IEC 1010. NE JAMAIS INSERER DE BOUT DÉ SONDE AVEC RESSORT BANANE DANS UN JACK D'ESSAI D'ACCESSOIRES QUI SERA UTILISE COMME DISPOSITIF DE SONDAGE A MAIN.


—Se deben usar sólo tapones de prueba reforzados del tipo IEC 1010 con receptáculos de tipo IEC 1010. NUNCA INTRODUZCA UNA CLAVIJA CON UN MUELLE TIPO BANANA EN UN RECEPTACULO DE PRUEBA QUE A SU VEZ SE USE COMO APARATO DE PRUEBA MANUAL.



CAT

Both Direct and Alternating Current. Courant Continu et Alternatif. Corriente Directa y Alterna.





Overvoltage Category I, II, III or IV. Surtension Catégorie I, II, III ou IV. Sobretensión de Categoria I, II III o IV.



Caution! Refer to Accompanying Documents. Attention! Se Reporter aux Documentsjoints. ¡Peligro! Consulte los Documentos Adjuntos.



Caution! Risk of Electric Shock. Attention ! Risque de Choc Électrique. ¡Peligro! Riesgo de Sacudida Eléctrica.



All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA