


Model 7073

BNC (F) Straight PCB Mount 50 Ω

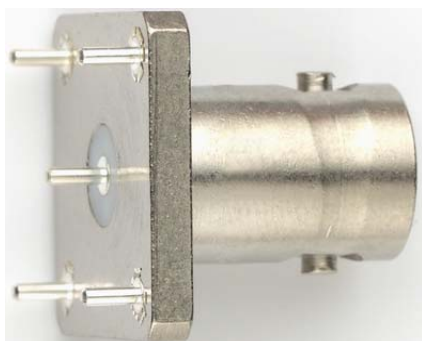

Model 7073 BNC (F) Straight PCB Mount 50 Ω

Use for secure attachment in
50 Ω PCB mount applications.

Features


- Convenient PCB mount configuration.
- Precision machined body with gold plated contacts.
- Insulation PTFE (**not delrin**).

Materials

- Body is machined brass with tarnish resistant nickel plating.
- Female center contacts are gold-plated heat treated beryllium copper.
- Body made from precision machined high quality brass (not die cast).
- High quality machined PTFE dielectric.

Ordering Information

Model: 7073 BNC (F) PCB Mount.

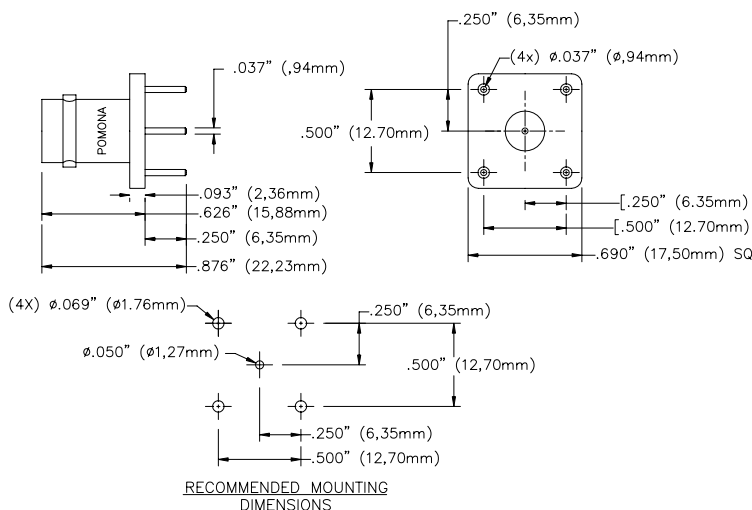

Specifications

Nominal impedance	50 Ω
Frequency	0-4 GHz
VSWR	1.30 max. 0-4 GHz
Center / Outer contact resistance	1.5 / 1.0 m Ω
Number of insertions	500
Insulation resistance	5000 M Ω (min)
Dielectric withstand voltage	1500 Vrms
Ratings: Voltage: 500 Vrms Operating temperature: -85° F to +131 °F (-65 °C to +155 °C) Max.	

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = $\pm .02"$ (.51 mm), .xxx = $\pm .005"$ (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.