

## Model 72917 4mm Banana Plug to 2mm Sheathed Banana Jack Adapter



# Easy Adaptation from 2mm to 4mm Test

#### **Features**

- Accepts 2mm safety-sheathed banana plugs
- Converts to standard 4mm banana plug
- Rating: 33 Vac / 70 Vdc, 10A


#### **Materials**

• Insulation: Polyamide

Plug body: Nickel-plated Brass

## **Ordering Information**

Model:72916- Color Sold in packages of 10 pieces Available colors: Black (-0) or Red (-2)

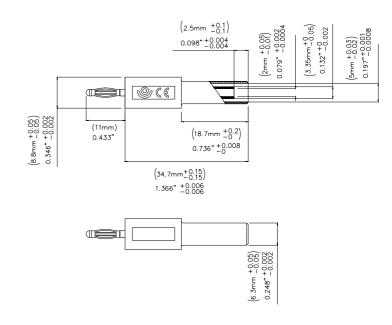

### **Specifications**

Max Current	Max. 10A
Max Voltage	33 V AC / 70 V DC
Temperature	-20° C + 80° C
Max Resistance	Less than 0.8 m $\Omega$

**Rating:** hands free testing in controlled environment: 70Vrms max. For CE compliance: Not intended for handheld use at voltages above 33Vrms/70Vdc

**USA:** Sales: 800-490-2361 Fax: 888-403-3360 **Europe:** 31-(0) 40 2675 150 **International**: 425-446-5500

e-mail: <a href="mailto:technicalsupport@pomonatest.com">technicalsupport@pomonatest.com</a>
Where to Buy: <a href="mailto:www.pomonaelectronics.com">www.pomonaelectronics.com</a>

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.