


# Technical Data Sheet

### Model 72920 2mm SAFETY Sheathed Patch Cords



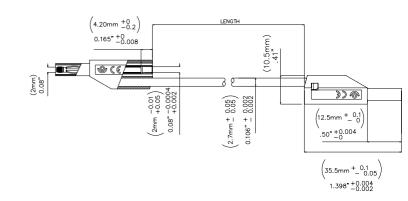

#### **Features**

- Multi-stacking 2mm safety sheathed male/male patch cord, PVC
- Rating: 600V Cat II
- 10A Max.

#### **Materials**

- · Plug Body: Nickel Plated Brass
- Spring: Nickel plated Beryllium copper
- Spring tip: Polysulfone
- Insulation: Polpropylene.
- · Wire Insulation: PVC.

## **Ordering** Information

Model: 72920-Length-Color

Lengths: 20 inch (50cm) or 39in (100mm)

Colors: Black (-0) or Red (-2)

## **Specifications**

Operating Temperature	-20 °C to +80 °C
Max Current	10A
Max Voltage	600 V CAT II
Max Resistance	15 m Ω at 20 inch 20 m Ω at 39 inch

USA: Sales: 800-490-2361 Technical Support: 800-241-

2060 Fax: 888-403-3360

**Europe:** 31-(0) 40 2675 150 **International**: 425-446-5500

e-mail: <a href="mailto:technicalsupport@pomonatest.com">technicalsupport@pomonatest.com</a>
Where to Buy: <a href="mailto:www.pomonaelectronics.com">www.pomonaelectronics.com</a>

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2004 1/17/06 72920 Rev A Page 1 of 1