




Weidenweg 21 58239 Schwerte Tel.: 02304-96109-0 Fax: 02304-96109-88 E-Mail: info@pewa.de

## Model 73051 N Type Plug, 50 Ohm, Clamp Type, RG8, 213



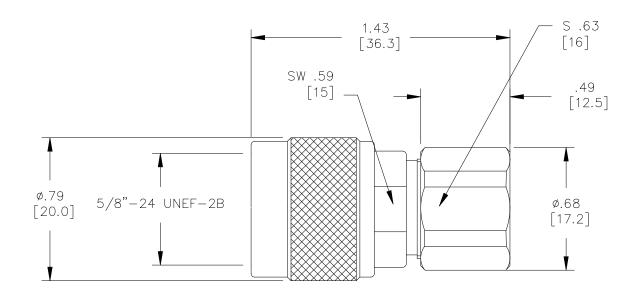

Model 73051 N Type Plug, 50 Ohm, Clamp Type, RG8, 213

#### **Features**

- DC 11GHz bandwidth.
- Connectors are precision machined.
- Meets interface requirements MIL-C-39012.
- Connector accepts cable types RG/U: 8, 213

#### **Materials**

Center Conductor, Male: Brass, Gold Plated Connector Body: Brass, Nickel Plated Insulators: PTFE

#### **Specifications**

Impedance:	50Ω
Frequency Range:	DC – 11GHz
Contact Resistance:	
Center Conductor:	≤1.0 mΩ
Outer Conductor:	≤0.2 mΩ
Insulation Reistance:	≥ 5000 MΩ
Dielectric Withstand Voltage:	1500V
For CE compliance, do not hold in hand when	
voltages exceed 33 Vrms / 70 Vdc.	
Number of Insertions:	500 cycles minimum

### **Ordering Information**


Model: 73051

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.




# Model 73051

#### N Type Plug, 50 Ohm, Clamp Type, RG8, 213

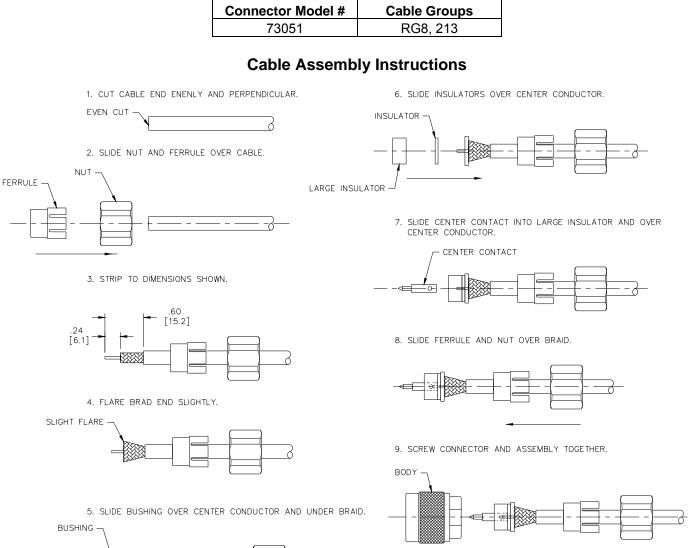

**Cable Types** 



All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.