


Model 73058 UHF Jack to Jack Adapter

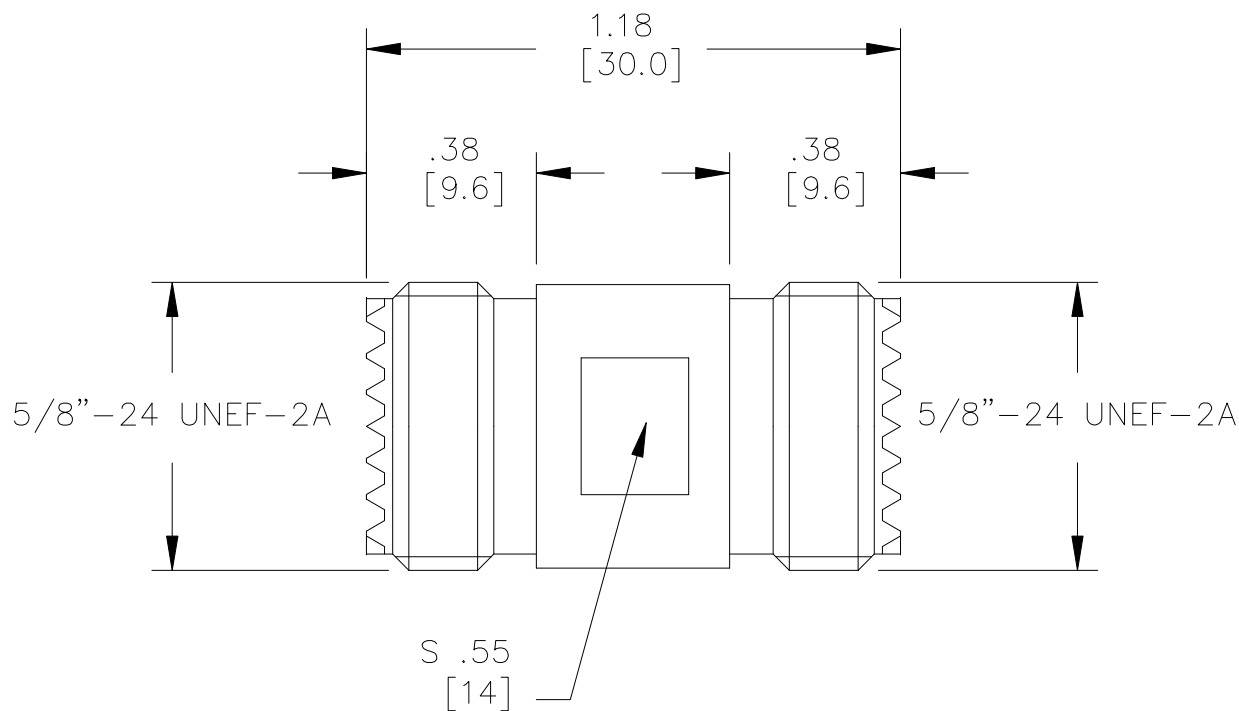

Model 73058
UHF Jack to Jack Adapter

Materials

Center Conductor: Phosphor Bronze, Gold Plated
Connector Body: Brass, Nickel Plated
Insulators: PTFE

Specifications

Frequency Range: DC – 300MHz
Contact Resistance:

Center Conductor: $\leq 1.0 \text{ m}\Omega$

Outer Conductor: $\leq 0.2 \text{ m}\Omega$

Insulation Resistance: $\geq 300 \text{ M}\Omega$

Dielectric Withstand Voltage: 750V

For CE compliance, do not hold in hand when
voltages exceed 33 Vrms / 70 Vdc.

Number of Insertions: 500 cycles minimum

Ordering Information

Model: **73058**

Features

- DC – 300MHz bandwidth.
- Connectors are precision machined.

All dimensions are in inches. Tolerances (except noted): .xx = ± 0.02 " (.51 mm),
.xxx = ± 0.005 " (.127 mm). All specifications are to the latest revisions.
Specifications are subject to change without notice. Registered trademarks are
the property of their respective companies.