

XLR Straight Cable Connectors — General Duty



Model#	Type	Pins	Shell	Contacts	Lbs of Pull
5125A	(f)	5	Nickel	Silver	45
5126A	(m)	5	Nickel	Silver	45
6850	(f)	3	Black Nickel	Gold	45
6851	(m)	3	Black Nickel	Gold	45
7093	(m)	4	Nickel	Silver	45
7094	(f)	4	Nickel	Silver	45
7283	(f)	3	Nickel	Silver	45
7284	(m)	3	Nickel	Silver	45

Streamlined profile with compact shell. Time saving assembly (3 parts). No set screws. Solderable.

XLR Plug to XLR Jack Low Noise Cable Assembly




Model#	Length
6869-180	4.6 m (15 ft)
6869-300	7.6 m (25 ft)

Low noise audio cable includes a 3-pin XLR male connector and a 3 contact XLR female connector.
Pull: 45.35 kg (100 lbs).
Material: *Shell:* tarnish resistant black nickel-plated brass; *Center Contact:* gold-plated brass.


Wall/Floor Mount Male XLR Receptacle



Model#	Pins
5117A	3



XLR/RCA Adapters




Model#	Type
7269	XLR (f)/RCA (m)
7270	XLR (m)/RCA (m)
7271	XLR (f)/RCA (f)
7272	XLR (m)/RCA (f)

Audio adapters offer 3 contact XLR to RCA (phono) conversion. Body is die cast zinc alloy with tarnish resistant nickel plating. Contacts are nickel-plated brass.

Wall/Floor Mount Female XLR Receptacle



Model#	Sockets
5113A	3

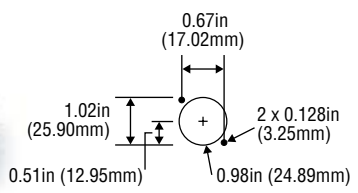

XLR Adapters



Model#	Type
6856	XLR (F)/XLR (F)
6857	XLR (M)/XLR (M)

Body is die cast zinc alloy with tarnish resistant nickel plating. Male pin contacts are nickel-plated brass. Female contacts are nickel-plated beryllium copper.

XLR Female 3-Pin Square Flanged Panel Receptacle, Horizontal PC Board



7111

3-pin XLR square panel mount receptacle for horizontal PC board mounting. Sturdy all metal one piece design. Housing is die-cast zinc alloy with tarnish resistant black nickel plating. Solder cup terminations. Front mountable.

XLR to 1/4 in Adapters



Model#	Type
6863	XLR (F) / 1/4 in Plug (stereo)
6864	XLR (M)/1/4 in Plug (stereo)

Adapters offers 3 contact XLR to 1/4 inch conversion. Sleek light weight design. XLR body is die cast zinc alloy with tarnish resistant nickel-plating. 1/4 inch plugs are nickel-plated machined brass. XLR contacts are nickel-plated brass.

XLR (F) 3-Pin Square Flanged Panel Receptacle



7115

3-pin XLR square panel mount female receptacle with sturdy all metal one piece design. Housing is die-cast zinc alloy with tarnish resistant black nickel plating and gold plated contacts. Solder cup terminations. Front mountable.