



LK4-B LK4-B/SIL

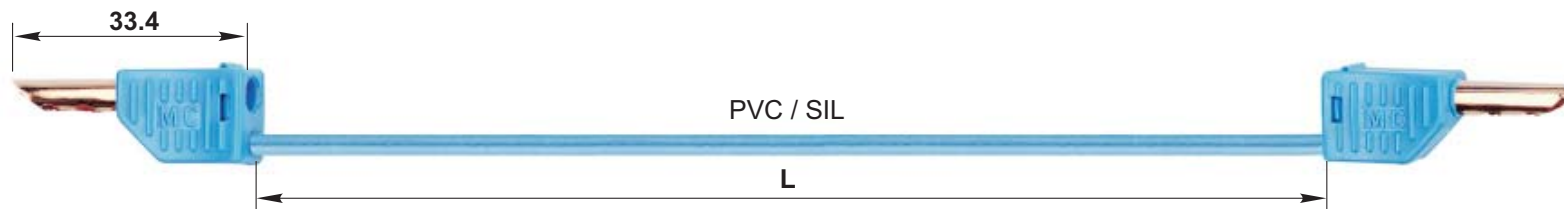

PEWA
Messtechnik GmbH
Weidenweg 21
58239 Schwerte
Tel.: 02304-96109-0
Fax: 02304-96109-88
E-Mail: info@pewa.de
Homepage: www.pewa.de



Hoch flexible Messleitungen mit PVC- oder Silikon-Isolierung, beidseitig mit stapelbarem Ø 4 mm-Hohlstecker.

Highly flexible test leads with insulation in PVC or Silicone with stackable Ø 4 mm hollow plugs on both ends.

Cordons de mesure extra-souples à isolation en PVC ou Silicone, équipés des deux côtés d'une fiche creuse Ø 4 mm à reprise arrière.

Typ Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Leitungsquerschnitt Lead cross section Section du câble		Längen [cm] Lead lengths [cm] Longueurs [cm]	*Farben *Colours *Couleurs
---------------------	-------------------------------------	--	---	--	--	----------------------------------

LK4-B	28.0055-□*	30 V _{AC} ~ 60 V _{DC} / 19 A	1,0 mm ²	Au	PVC	<table><tr><td>0 25</td><td>0 50</td><td>0 75</td></tr><tr><td>1 00</td><td>1 50</td><td>2 00</td></tr></table>	0 25	0 50	0 75	1 00	1 50	2 00	<table><tr><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td></tr><tr><td>29</td><td></td><td></td><td></td><td></td></tr></table>	21	22	23	24	25	29				
0 25	0 50	0 75																					
1 00	1 50	2 00																					
21	22	23	24	25																			
29																							
LK4-B/SIL	28.0056-□*	30 V _{AC} ~ 60 V _{DC} / 19 A	1,0 mm ²	Au	SIL	<table><tr><td>0 25</td><td>0 50</td><td>0 75</td></tr><tr><td>1 00</td><td>1 50</td><td>2 00</td></tr></table>	0 25	0 50	0 75	1 00	1 50	2 00	<table><tr><td>21</td><td>22</td><td>23</td><td>24</td><td>25</td></tr></table>	21	22	23	24	25					
0 25	0 50	0 75																					
1 00	1 50	2 00																					
21	22	23	24	25																			