




GBSA/M8



GBSA/M12



GBSA/M16



Anschlussmöglichkeiten
Possible connections
Raccordements possibles

Ø 4mm

Siehe Katalog
See catalogue
Voir catalogues


Test & Measureline



Isolation Insulation Isolation	PA
Temperaturbereich Operating temperature Températures	-15°C ... 80°C

Bemessungsstrom Rated current Intensité assignée	1A
Bemessungsspannung Rated voltage Tension assignée	1000V, CATIV

Beispiel / Example / Exemple

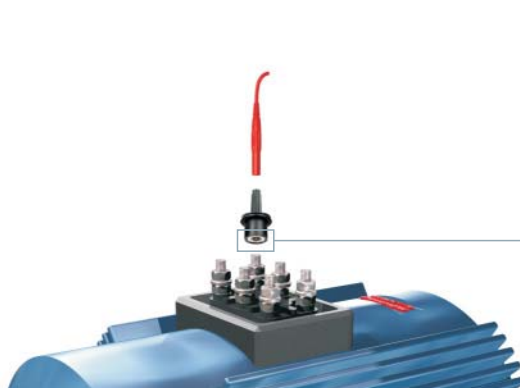

Federnde Kontaktspitze
Spring loaded tip
Contact à pointe de ressort

Typ Type Type	Bestell.-Nr. Order No. No. de Cde	mit Einsatz für Gewindebolzen with insert for threaded bolts avec insert pour embout fileté	Farben Colours Couleurs
GBSA/M8	20.2040-*	M8	20 21 22 23 24 25 26 27 28 29
GBSA/M12	20.2000-*	M12	20 21 22 23 24 25 26 27 28 29
GBSA/M16	20.2010-*	M16	20 21 22 23 24 25 26 27 28 29

¹⁾ nur im Griffbereich

* Bitte den Farbcode angeben

¹⁾ only in the handling section

* Add the desired colour code

¹⁾ Seulement dans la zone de préhension

* Indiquer le code couleurs s.v.p.