


1:1

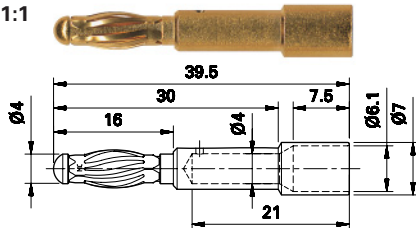

LS460-P

22.1049

4

Crimpen
Crimping
Sertir


CuZn, Au

~10

150

50

0,2



Knickschutztüle T-POAG-6, TPE,
Leitungsquerschnitt 6mm²
Bestell-Nr. 15.5004-*

siehe Montageanleitung MA163
www.multi-contact.com

Anti-kink sleeve T-POAG-6, TPE,
conductor cross section 6mm²,
Order No. 15.5004-*

see assembly instructions MA163
www.multi-contact.com

* Farben / Colours / Couleurs

21

22

24

Capuchon isolant en TPE,
T-POAG, section du câble 6mm²
No. de Cde 15.5004-*

voir instructions de montage MA163
www.multi-contact.com

¹⁾ je nach Anschlussart und Querschnitt

¹⁾ According to connecting method and cross section

¹⁾ Selon la méthode de raccordement et la section du conducteur



PEWA
Messtechnik GmbH
Weidenweg 21
58239 Schwerte

Tel.: 02304-96109-0
Fax: 02304-96109-88
E-Mail: info@pewa.de
Homepage: www.pewa.de