


Axiale Ø 4 mm-Buchsen

SLS410-B SLS415-B SLS425-B




In-line Ø 4 mm Sockets

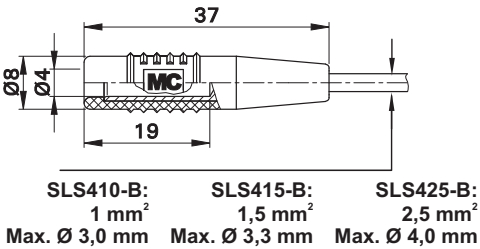


Starre Ø 4 mm-Buchsen für die Selbstmontage von Messleitungen. Weiche Isoliertülle. **Lötanschluss.**

Ø 4 mm rigid sockets for self-assembly of test leads. Soft insulator. **Solder connection.**

Douilles Ø 4 mm droites



LS410-B
LS425-B



KT410-L
KT415-L
KT425-L



MA 117

Douilles rigides Ø 4 mm, destinées à la confection de cordons de mesure. Manchon isolant souple. **Raccord à souder.**


Type Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Einzelteile: Knüpfülle / Buchse Component parts: Insulator / Socket Pièces détachées : Capuchon isolant / Douille		*Farben *Colours *Couleurs
SLS410-B	22.2649-*	30 V _{AC} ~ 60 V _{DC} / max. 19 A	KT410-L, 22.2170-* / LS410-B, 22.1012	Au	21 22 23 24 25 26 27 28 29
SLS415-B	22.2650-*	30 V _{AC} ~ 60 V _{DC} / max. 24 A	KT415-L, 22.2180-* / LS410-B, 22.1012	Au	21 22 23 24 25
SLS425-B	22.2651-*	30 V _{AC} ~ 60 V _{DC} / max. 32 A	KT425-L, 22.2190-* / LS425-B, 22.1016	Au	21 22 23 24 25 29

Axiale Ø 4 mm-Stecker


SLS410-L SLS415-L SLS425-L



In-line Ø 4 mm Plugs

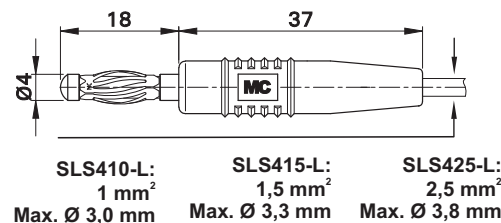

Fiches Ø 4 mm droites

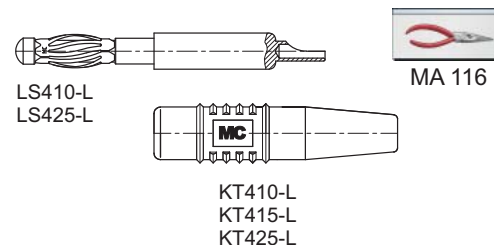

Axiale Ø 4 mm-Stecker mit federnder Kontaktlamelle für die Selbstmontage von Messleitungen. Weiche Isoliertülle. **Lötanschluss.**

In-line Ø 4 mm plugs with spring-loaded Multilam for self-assembly of test leads. Soft insulator. **Solder connection.**

Fiches à lamelles Ø 4 mm droite, destinées à la confection de cordons de mesure. Manchon isolant souple. **Raccord à souder.**

Typ Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Einzelteile: Knüpfülle / Stecker Component parts: Insulator / Plug Pièces détachées : Capuchon isolant / Fiche		*Farben *Colours *Couleurs
SLS410-L	22.2646-*	30 V _{AC} ~ 60 V _{DC} / max. 19 A	KT410-L, 22.2170-* / LS410-L, 22.1011	Au	21 22 23 24 25 26 27 28 29
SLS415-L	22.2647-*	30 V _{AC} ~ 60 V _{DC} / max. 24 A	KT415-L, 22.2180-* / LS410-L, 22.1011	Au	21 22 23 24 25
SLS425-L	22.2648-*	30 V _{AC} ~ 60 V _{DC} / max. 32 A	KT425-L, 22.2190-* / LS425-L, 22.1015	Au	21 22 23 24 25 29