


Lamellenstecker

Ø 4mm

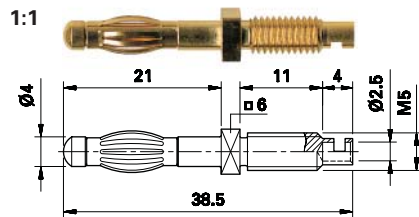

Multilam plugs

Ø 4mm

Fiches à lamelles

Ø 4mm


Type Type Type	Bestell-Nr. Order No. No. de Cde	Nenn-Ø Nominal-Ø Ø nominal	Anschlussvariante Type of termination Type de raccordement	Metallteile / Oberfläche Metal parts / plating Partie métallique / traitement	Auszugskraft Withdrawal force Effort de débrochage	Obere Grenztemperatur Max. Temperature Température max.	Bemessungsstrom ¹⁾ Rated current ¹⁾ Intensité assignée ¹⁾	Kontaktwiderstand Contact resistance Résistance de contact
		mm			N	°C	A	mΩ

SA479	22.6205	4	M5 / Löt M5 / Soldering M5 / Souder	CuZn, Au	~5	150	50	0,3
-------	---------	---	---	----------	----	-----	----	-----


Montagematerial bitte
separat bestellen,
siehe Seite 14.

Assembly material, please
order separately,
see page 14.


Accessoires de montage à
commander séparément, voir
page 14.



SA481	22.1081	4	Löten Soldering Souder	CuZn, Ni	~10	150	50	0,4
-------	---------	---	------------------------------	----------	-----	-----	----	-----



SA482	22.1082	4	Löten Soldering Souder	CuZn, Ni	~10	150	50	0,4
-------	---------	---	------------------------------	----------	-----	-----	----	-----



SA483	22.1083	4	M3	CuZn, Ni	~10	150	50	0,4
-------	---------	---	----	----------	-----	-----	----	-----

Montagematerial bitte
separat bestellen,
siehe Seite 15.

Assembly material, please
order separately,
see page 15.

Accessoires de montage à
commander séparément, voir
page 15.

¹⁾ je nach Anschlussart und Querschnitt

¹⁾ According to connecting method and cross section

¹⁾ Selon la méthode de raccordement et la section du conducteur