


Type Type Type	Bestell-Nr. Order No. No. de Cde	Isolation Griffteil Insulation handle Isolation	Temperaturbereich Operating temperature Température	Metallteile / Oberfläche Metal parts / plating Partie métallique / traitement	Bemessungsstrom Rated current Intensité assignée	Steckweite Plug spacing Entraxe	
			°C		A	mm	

1:1

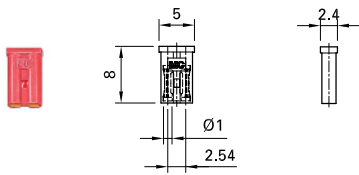


KB1-2,54/1	24.0053-*	PA	-40...80	Cu(Leg) ¹⁾ Cu(alloy) ¹⁾ Cu(alliage) ¹⁾	10	2,54
------------	-----------	----	----------	---	----	------

* Farben / Colours / Couleurs

22 23 24 28

1:1

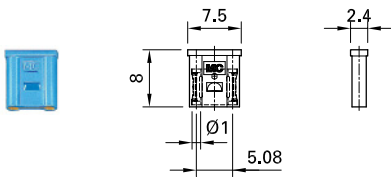


KB1-5,08/1	24.0054-*	PA	-40...80	Cu(Leg) ¹⁾ Cu(alloy) ¹⁾ Cu(alliage) ¹⁾	10	5,08
------------	-----------	----	----------	---	----	------

* Farben / Colours / Couleurs

22 23 24 28


1:1

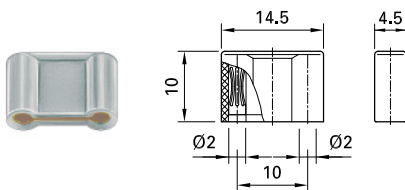

KB2-10	24.0051-*	PA	-40...80	Cu(Leg) ¹⁾ Cu(alloy) ¹⁾ Cu(alliage) ¹⁾	10	10
--------	-----------	----	----------	---	----	----

* Farben / Colours / Couleurs

22 23 24 28

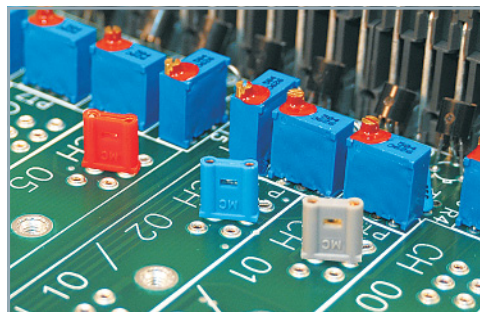

¹⁾ Hartkupferlegierung, vergoldet

¹⁾ Hard-drawn copper alloy, gold plated

¹⁾ Alliage de cuivre dur, doré