


Typ Type Type	Bestell-Nr. Order No. No. de Cde	Nenn-Ø Nominal-Ø Ø nominal	Anschlussvariante Type of termination Type de raccordement	Sandwichbauweise Sandwich board construction Construction étagée possible	Metallteile / Oberfläche Metal parts / plating Partie métallique / traitement	Auszugskraft Withdrawal force Effort de débrochage	Bemessungsstrom ¹⁾ Rated current ¹⁾ Intensité assignée ¹⁾	Kontaktwiderstand Contact resistance Résistance de contact
		mm				N	A	mΩ

1:1

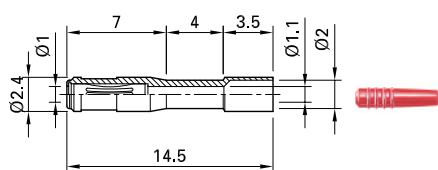

B1-TH 41.6000 1 ⑨ - CuZn, Au ~3 20 ~1

Passendes Isolierteil / Suitable insulation / Capuchon isolant adapté		
Bezeichnung / Designation / Désignation	Typ / Type / Type	Bestell-Nr. / Order No. / No. de Cde
Isolierteil / Insulation / Isolant	KT2-S	22.2010-*

⑨ Crimpen 0,25mm²


⑨ Crimping 0,25mm²

⑨ Sertissage 0,25mm²

* Farben / Colours / Couleurs



1:1

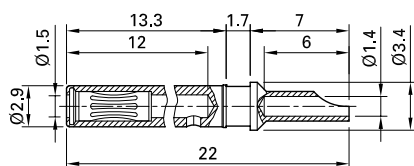


B1,5 41.6011 1,5 ② - CuZn, Au ~1 25 ~0,9

② Löten

② Soldering

② Soudage

1:1



**B1,57-20R 41.6058 1,57 ⑨ Cu(Leg)²⁾
Cu(alloy)²⁾ ~3 10 ~0,5
Cu(alliage)²⁾**

⑨ Crimpen für AWG20

⑨ Crimping for AWG20

⑨ Sertissage pour AWG20

¹⁾ je nach Anschlussart und Querschnitt

²⁾ Kontaktlamelle:
Hartkupferlegierung, vergoldet (1,2µm Au);
Kontaktkörper: Messing, vergoldet (0,5µm Au)

¹⁾ According to connecting method and cross section

²⁾ Multilam:
hard-drawn copper alloy, gold-plated (1,2µm Au);
contact body: brass, gold-plated (0,5µm Au)

¹⁾ Selon le type de raccordement et la section du conducteur

²⁾ Contact à lamelles:
alliage de cuivre dur, doré (1,2µm Au); corps de
douce: laiton, doré (0,5µm Au)