



LK0,63-B

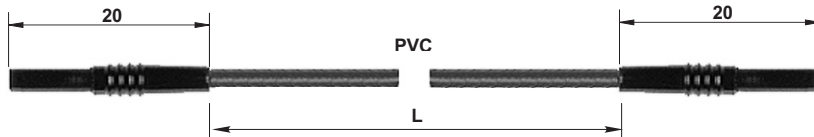

Hoch flexible Messleitung, beidseitig mit $\square$ 0,63 mm-Buchse mit federnder Kontaktlamelle.

Highly flexible test lead with $\square$ 0,63 mm sockets with spring-loaded Multilam on both ends.



Cordon de mesure extra-souple, équipé des deux côtés d'une douille à lamelles $\square$ 0,63 mm.

Typ Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Leitungsquerschnitt Lead cross section Section du câble		Länge [cm] Lead length [cm] Longueur [cm]	Farbe Colour Couleur
---------------------	-------------------------------------	--	---	--	---	----------------------------

LK0,63-B

68.3333-01521

30 V_{AC} ~ 60 V_{DC} / 6 A


0,5 mm²

Au

PVC

015

21



PEWA
Messtechnik GmbH

Weidenweg 21
58239 Schwerte

Tel.: 02304-96109-0
Fax: 02304-96109-88
E-Mail: info@pewa.de
Homepage : www.pewa.de