


## Stapelbare Ø 4 mm-Stecker

**XL-459/30**




Stapelbarer Ø 4 mm-Stecker mit federnder Kontaktlamelle für die Selbstmontage von Messleitungen. Mit starrer Isolierhülse. Kabelzuführung unter 30°. **Schraubanschluss.**

## Stackable Ø 4 mm Plugs

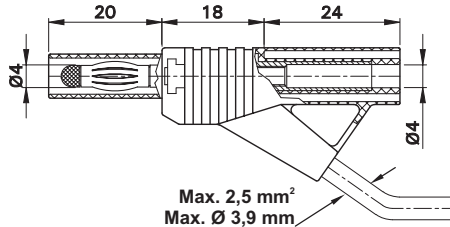

Stackable Ø 4 mm plug with spring-loaded Multilam for self-assembly of test leads. With rigid insulating sleeve. With 30° cable outlet. **Screw connection.**


## Fiches Ø 4 mm à reprise arrière



XLS-459



MAH 502



XKT-459/30

Fiche à lamelles Ø 4 mm à reprise arrière destinée à la confection de cordons de mesure. Protégée par un fourreau isolant rigide. Entrée de câble à 30°. **Raccord à visser.**

Typ Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Einzelteile: Knüpfhülle / Stecker Component parts: Insulator / Plug Pièces détachées : Capuchon isolant / Fiche	*Farben *Colours *Couleurs
---------------------	-------------------------------------	--	---	----------------------------------

**XL-459/30**

**66.9649-\***

1000 V, CAT II / max. 32 A

XKT-459/30, 66.1006-\* / XLS-459, 66.1007

**Ni**

21 22 23 24 25  
26 27