


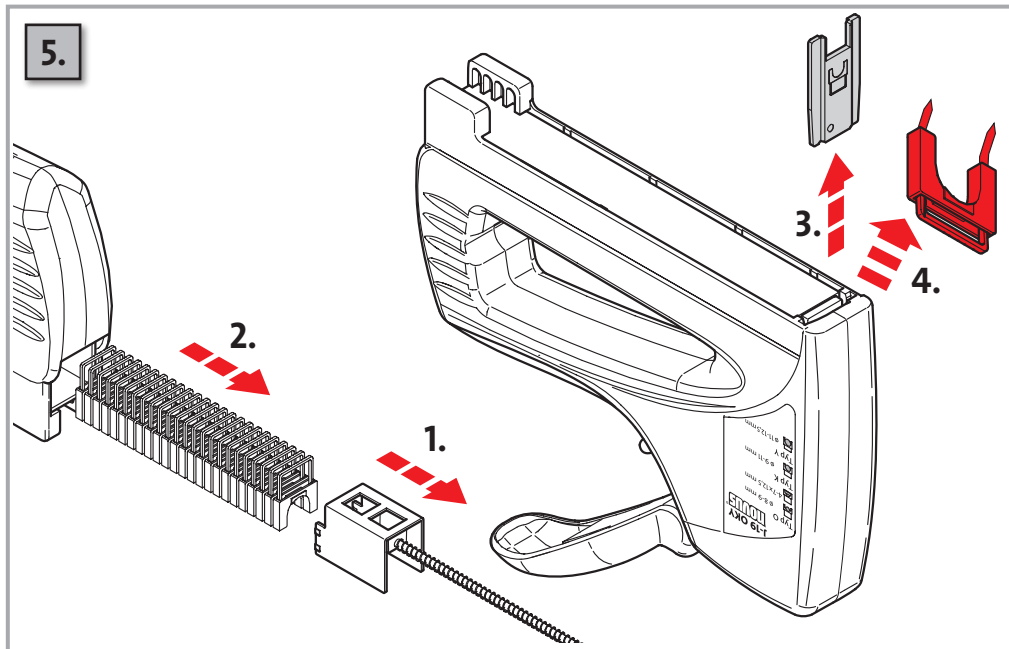

Vertrieb – Sales

STEINEL Vertrieb GmbH

Dieselstraße 80-84

D-33442 Herzebrock-Clarholz

Tel.: +49 (0) 52 45 / 4 48 - 0

Fax: +49 (0) 52 45 / 4 48 - 197

Internet: www.steinel.de

Zentrale

e-mail: info@steinel.de

Garantie-Service Deutschland

Service

Tel.: +49 (0) 52 45 / 4 48 - 188

novus®
BEFESTIGUNGSTECHNIK

08/07 Technische und Design Änderungen vorbehalten! Technical and design modifications reserved!



1.

25x
O
10 mm
ø 8-9 mm
4-7 mm x 12,5 mm

25x
K
12 mm
ø 9-11 mm

25x
Y
14 mm
ø 11-12,5 mm

+

Diagram illustrating the assembly of the J-19 OKY device. It shows three types of components (O, K, Y) and their corresponding dimensions. The components are shown being inserted into the device, which has a label listing the types and their dimensions.

2.

Diagram illustrating the assembly of the J-19 OKY device. It shows three types of components (O, K, Y) and their corresponding dimensions. The components are shown being inserted into the device, which has a label listing the types and their dimensions.

3.

Diagram illustrating the correct and incorrect way to use the J-19 OKY device. It shows a warning against using the device on a surface that is not flat or smooth. The correct usage is shown with a hand holding the device over a flat surface, with a red arrow indicating the direction of movement.

4.

Diagram illustrating the correct and incorrect way to use the J-19 OKY device. It shows a warning against using the device on a surface that is not flat or smooth. The correct usage is shown with a hand holding the device over a flat surface, with a red arrow indicating the direction of movement.

Diagram illustrating the correct and incorrect way to use the J-19 OKY device. It shows a warning against using the device on a surface that is not flat or smooth. The correct usage is shown with a hand holding the device over a flat surface, with a red arrow indicating the direction of movement.