PEWA

 Messtechnik GmbH

 Weidenweg 21

 58239 Schwerte


 Tel.: 02304-96109-0

 Fax: 02304-96109-88

 E-Mail: info@pewa.de

 Homepage : www.pewa .de

# Model 2631 Breakout: BNC (Female) To Minigator Test Clips **CE**

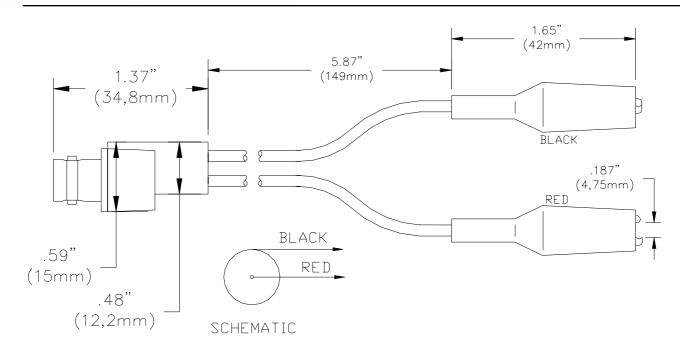

#### **FEATURES:**

- ✓ Converts BNC (male) cables / connectors to minigator test clips for test versatility.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- BNC center contact is gold plated Beryllium Copper for corrosion resistance, low contact resistance and long insertion life.
- ✓ Minigator clips attach to terminals up to .187" (4.75mm) diameter.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

## **MATERIALS:**

*BNC*: Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper *Dielectric*: PTFE *Wire*: 20 AWG, PVC Insulated *Minigators*: Nickel plated steel, Spring: stainless steel *Boot*: Vinyl, color matches color of wire

#### **RATINGS:**

Operating Voltage: Hands free testing in controlled voltage environments: 45 VRMS Max. Operating Temperature: +122°F (+50°C) Max.

## **ORDERING INFORMATION:** Model 2631\*

\* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com