


Model 4274

Multi-Stacking Banana Plug Patch Cord with In-Line Fuse Holder

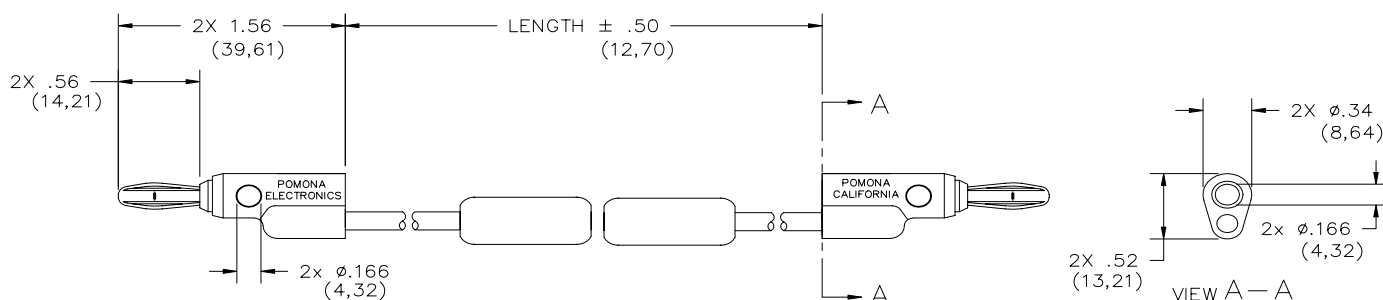

Model 4274
Multi-Stacking Banana Plug Patch Cord
with In-Line Fuse Holder

Materials

Connector: Stacking Banana Plug:

Material: Brass body, Beryllium Copper spring, nickel plated.

Insulation: Polypropylene.

Wire: 18 AWG, 65 x 36 t.c., PVC insulated, 3.7 (.144)

O.D. Fuse holder, brass, tin plated.

Insulation: PVC. Accepts 6.4 (.25) dia. SFE and AGC fuses (not included).

Specifications

Operating Temperature: +55°C (+131°F) Max.

Voltage:

For CE Compliance and for personal safety, do not hold in hand when voltages exceed 33Vrms/70Vdc.

Maximum voltage for hands free use in a controlled voltage environment: 5000 WVDC Max.

Current: 15 Amperes

Ordering Information

Model: 4274-XX-*

XX = Cable Lengths, Standard Lengths: 36" (914)

Additional lengths may be quoted upon request.

* = Color, -0 Black, -2 Red

Ordering Example: 4274-36-2 Indicates 36" in length, color is Red.

Features

- Provides protection from over current.
- Accepts standard .25 inch (6.4mm) diameter SFE and AGC fuses (fuse not included).
- Mates to Model #1581, 2854 or any standard banana jack.
- Vertical and cross stackable.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.