

3. HAZARD IDENTIFICATION (continued)

Inhalation over-exposures to atmospheres containing more than the Threshold Limit Value of Carbon Monoxide (25 ppm), another component of this gas mixture, can result in serious health consequences. Carbon Monoxide is classified as a chemical asphyxiant, producing a toxic action by combining with the hemoglobin of the blood and replacing the available oxygen. Through this replacement, the body is deprived of the required oxygen, and asphyxiation occurs. Since the affinity of Carbon Monoxide for hemoglobin is about 200-300 times that of oxygen, only a small amount of Carbon Monoxide will cause a toxic reaction to occur. Carbon Monoxide exposures in excess of 50 ppm will produce symptoms of poisoning if breathed for a sufficiently long time. If this gas mixture is released in a small, poorly ventilated area (i.e. an enclosed or confined space), symptoms which may develop include the following:

CONCENTRATION OF CARBON MONOXIDE

All exposure levels:

200 ppm:
400 ppm:
1,000 -2000 ppm:

200-2500 ppm:

>2500 ppm:

Additionally, if mixtures of this gas mixture contain less than 19.5% Oxygen and are released in a small, poorly ventilated area (i.e. an enclosed or confined space), an oxygen-deficient environment may occur. Individuals breathing such an atmosphere may experience symptoms which include headaches, ringing in ears, dizziness, drowsiness, unconsciousness, nausea, vomiting, and depression of all the senses. Under some circumstances of over-exposure, death may occur. The following effects associated with various levels of oxygen are as follows:

CONCENTRATION OF OXYGEN

12-16% Oxygen:
10-14% Oxygen:
6-10% Oxygen:
Below 6%:

OBSERVED EFFECT

Over-exposure to Carbon Monoxide can be indicated by the lips and fingernails turning bright red.
Slight symptoms (i.e. headache) after several hours of exposure.
Headache and discomfort experienced within 2-3 hours of exposure.
Within 30 minutes, slight palpitations of the heart occurs. Within 1.5 hours, there is a tendency to stagger.
Within 2 hours, there is mental confusion, headaches, and nausea. Unconsciousness within 30 minutes.
Potential for collapse and death before warning symptoms.

OBSERVED EFFECT

Breathing and pulse rate increased, muscular coordination slightly disturbed.
Emotional upset, abnormal fatigue, disturbed respiration.
Nausea, vomiting, collapse, or loss of consciousness.
Convulsive movements, possible respiratory collapse, and death.

SKIN and EYE CONTACT: Hydrogen Sulfide, a component of this gas mixture, may be irritating to the skin. Inflammation and irritation of the eyes can occur at very low airborne concentration of Hydrogen Sulfide (less than 10 ppm). Exposure over several hours may result in “gas eyes” or “sore eyes” with symptoms of scratchiness, irritation, tearing and burning. Above 50 ppm of Hydrogen Sulfide, there is an intense tearing, blurring of vision, and pain when looking at light. Over-exposed individuals may see rings around bright lights. Most symptoms disappear when exposure ceases. However, in serious cases, the eye can be permanently damaged.

HEALTH EFFECTS OR RISKS FROM EXPOSURE: An Explanation in Lay Terms. Over-exposure to this gas mixture may cause the following health effects:

ACUTE: Due to the small size of the individual cylinder of this gas mixture, no unusual health effects from exposure to the product are anticipated under routine circumstances of use. However the Hydrogen Sulfide and Carbon Monoxide components of this gas mixture are toxic to humans. Over-exposure to this gas mixture can cause nausea, dizziness, headaches, collapse, unconsciousness, coma, and death. Due to the presence of Hydrogen Sulfide, over-exposures to this gas mixture can also irritate the skin and eyes; severe eye contamination can result in blindness.

CHRONIC: Severe over-exposures to the Hydrogen Sulfide component of this gas mixture, which do not result in death, may cause long-term symptoms such as memory loss, paralysis of facial muscles, or nerve tissue damage. In serious cases of over-exposure, the eyes can be permanently damaged. Skin disorders and respiratory conditions may be aggravated by repeated over-exposures to this gas product. Refer to Section 11 (Toxicology Information) for additional information on the components of this gas mixture. Chronic exposure to oxygen-deficient atmospheres (below 18% oxygen in air) may affect the heart and nervous system.

TARGET ORGANS: ACUTE: Respiratory system, blood system, central nervous system effects, cardiovascular system, skin, eyes. CHRONIC: Neurological system, reproductive system, eyes.

4. FIRST-AID MEASURES

RESCUERS SHOULD NOT ATTEMPT TO RETRIEVE VICTIMS OF EXPOSURE TO THIS GAS MIXTURE WITHOUT ADEQUATE PERSONAL PROTECTIVE EQUIPMENT. At a minimum, Self-Contained Breathing Apparatus must be worn. Victim(s) who experience any adverse effect after over-exposure to this gas mixture must be taken for medical attention. Rescuers should be taken for medical attention if necessary. Take a copy of the label and the MSDS to physician or other health professional with victim(s).

No unusual health effects are anticipated after exposure to this gas mixture, due to the small cylinder size. If any adverse symptom develops after over-exposure to this gas mixture, remove victim(s) to fresh air as quickly as possible. Only trained personnel should administer supplemental oxygen and/or cardio-pulmonary resuscitation if necessary.

SKIN EXPOSURE: If irritation of the skin develops after exposure to this gas mixture, immediately begin decontamination with running water. Minimum flushing is for 15 minutes. Remove exposed or contaminated clothing, taking care not to contaminate eyes. Victim must seek immediate medical attention.

EYE EXPOSURE: If irritation of the eye develops after exposure to this gas mixture, open victim's eyes while under gentle running water. Use sufficient force to open eyelids. Have victim "roll" eyes. Minimum flushing is for 15 minutes. Seek medical assistance immediately, preferably an ophthalmologist.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE: Pre-existing respiratory conditions may be aggravated by over-exposure to this gas mixture. Carbon Monoxide, a component of this gas mixture, can aggravate some diseases of the cardiovascular system, such as coronary artery disease and angina pectoris. Because of the presence of Hydrogen Sulfide, eye disorders or skin problems may be aggravated by over-exposure to this gas mixture.

RECOMMENDATIONS TO PHYSICIANS: Treat symptoms and eliminate over-exposure. Hyperbaric oxygen is the most efficient antidote to Carbon Monoxide poisoning, the optimum range being 2-2.5 atm. A special mask, or, preferably, a compression chamber to utilize oxygen at these pressures is required. Avoid administering stimulant drugs. Be observant for initial signs of pulmonary edema in the event of severe inhalation over-exposures.

5. FIRE-FIGHTING MEASURES

FLASH POINT: Not applicable.

AUTOIGNITION TEMPERATURE: Not applicable.

FLAMMABLE LIMITS (in air by volume, %):

Lower (LEL): Not applicable.
Upper (UEL): Not applicable.


FIRE EXTINGUISHING MATERIALS: Non-flammable gas mixture. Use extinguishing media appropriate for surrounding fire.

UNUSUAL FIRE AND EXPLOSION HAZARDS: This gas mixture contains toxic gases, Hydrogen Sulfide and Carbon Monoxide, and presents an health hazard to firefighters. This gas mixture is not flammable; however, containers, when involved in fire, may rupture or burst in the heat of the fire.

Explosion Sensitivity to Mechanical Impact: Not Sensitive.
Explosion Sensitivity to Static Discharge: Not Sensitive.

SPECIAL FIRE-FIGHTING PROCEDURES: Structural firefighters must wear Self-Contained Breathing Apparatus and full protective equipment.

NFPA RATING

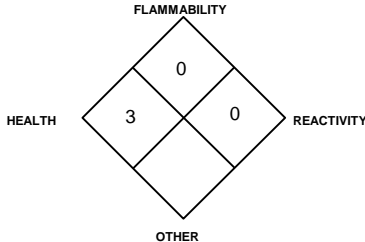

6. ACCIDENTAL RELEASE MEASURES

LEAK RESPONSE: Due to the small size and content of the cylinder, an accidental release of this gas mixture presents significantly less risk of over-exposure to Hydrogen Sulfide and Carbon Monoxide, the toxic components of this gas mixture, and other safety hazards related to the remaining components of this gas mixture, than a similar release from a larger cylinder. However, as with any chemical release, extreme caution must be used during emergency response procedures. In the event of a release in which the atmosphere is unknown, and in which other chemicals are potentially involved, evacuate immediate area. Such releases should be responded to by trained personnel using pre-planned procedures. Proper protective equipment should be used. In case of a leak, clear the affected area, protect people, and respond with trained personnel. For emergency disposal,

6. ACCIDENTAL RELEASE MEASURES (continued)

secure the cylinder and slowly discharge the gas to the atmosphere in a well-ventilated area or outdoors. Allow the gas mixture to dissipate. If necessary, monitor the surrounding area (and the original area of the release) for Hydrogen Sulfide, Carbon Monoxide, and Oxygen. Hydrogen Sulfide and Carbon Monoxide level must be below exposure level listed in Section 2 (Composition and Information on Ingredients) and Oxygen levels must be above 19.5% before non-emergency personnel are allowed to re-enter area. If leaking incidentally from the cylinder, contact your supplier.

7. HANDLING and USE

WORK PRACTICES AND HYGIENE PRACTICES: Be aware of any signs of dizziness or fatigue, especially if work is done in a poorly ventilated area; exposures to fatal concentrations of this gas mixture could occur without any significant warning symptoms, due to olfactory fatigue or oxygen deficiency. Do not attempt to repair, adjust, or in any other way modify cylinders containing a gas mixture with Hydrogen Sulfide or Carbon Monoxide. If there is a malfunction or another type of operational problem, contact nearest distributor immediately. Eye wash stations/safety showers should be near areas where this gas mixture is used or stored. All work operations should be monitored in such a way that emergency personnel can be immediately contacted in the event of a release. All work practices should minimize releases of Hydrogen Sulfide and Carbon Monoxide-containing gas mixtures.

STORAGE AND HANDLING PRACTICES: Cylinders should be firmly secured to prevent falling or being knocked-over. Cylinders must be protected from the environment, and preferably kept at room temperature (approximately 21→C (70→F). Cylinders should be stored in dry, well-ventilated areas, away from sources of heat, ignition, and direct sunlight. Protect cylinders against physical damage. Full and empty cylinders should be segregated. Use a first-in, first-out inventory system to prevent full containers from being stored for long periods of time. These cylinders are not refillable. **WARNING! Do not refill DOT 39 cylinders. To do so may cause personal injury or property damage.**

SPECIAL PRECAUTIONS FOR HANDLING GAS CYLINDERS: **WARNING!** Compressed gases can present significant safety hazards. During cylinder use, use equipment designed for these specific cylinders. Ensure all lines and equipment are rated for proper service pressure.

PROTECTIVE PRACTICES DURING MAINTENANCE OF CONTAMINATED EQUIPMENT: Follow practices indicated in Section 6 (Accidental Release Measures). Make certain that application equipment is locked and tagged-out safely. Always use product in areas where adequate ventilation is provided.

8. EXPOSURE CONTROLS - PERSONAL PROTECTION

VENTILATION AND ENGINEERING CONTROLS: No special ventilation systems or engineering controls are needed under normal circumstances of use. As with all chemicals, use this gas mixture in well-ventilated areas. If this gas mixture is used in a poorly-ventilated area, install automatic monitoring equipment to detect the levels of Oxygen, Hydrogen Sulfide, and Carbon Monoxide.

RESPIRATORY PROTECTION: No special respiratory protection is required under normal circumstances of use. Use supplied air respiratory protection if the levels of components exceeds exposure limits presented in Section 2 (Composition and Information of Ingredients) and Oxygen levels are below 19.5%, or unknown, during emergency response to a release of this gas mixture. If respiratory protection is needed, use only protection authorized in the U.S. Federal OSHA Standard (29 CFR 1910.134), applicable U.S. State regulations, or the Canadian CSA Standard Z94.4-93 and applicable standards of Canadian Provinces. Oxygen levels below 19.16.33% are considered IDLH by OSHA. In such atmospheres, use of a full-facepiece pressure/demand SCBA or a full facepiece, supplied air respirator with auxiliary self-contained air supply is required under OSHA's Respiratory Protection Standard (1910.134-1998). The following NIOSH respiratory protection recommendations for Hydrogen Sulfide and Carbon Monoxide are provided for further information.

NIOSH/OSHA RECOMMENDATIONS FOR HYDROGEN SULFIDE CONCENTRATIONS IN AIR:

Up to 100 ppm: Powered air-purifying respirator with cartridge(s) to protect against hydrogen sulfide; gas mask with canister to protect against hydrogen sulfide; or SAR; or full-facepiece SCBA.
Emergency or Planned Entry into Unknown Concentration or IDLH Conditions: Positive pressure, full-facepiece SCBA; or positive pressure, full-facepiece SAR with an auxiliary positive pressure SCBA.
Escape: Gas mask with canister to protect against hydrogen sulfide; or escape-type SCBA
NOTE: The IDLH concentration for Hydrogen Sulfide is 100 ppm.

NIOSH/OSHA RECOMMENDATIONS FOR CARBON MONOXIDE CONCENTRATIONS IN AIR:

Up to 350 ppm Supplied Air Respirator (SAR)
Up to 875 ppm Supplied Air Respirator (SAR) operated in a continuous flow mode.
Up to 1200 ppm Gas mask with canister to protect against carbon monoxide; or full-facepiece SCBA; or full-facepiece Supplied Air Respirator (SAR).
Emergency or Planned Entry into Unknown Concentration or IDLH Conditions: Positive pressure, full-facepiece SCBA; or positive pressure, full-facepiece Supplied Air Respirator (SAR) with an auxiliary positive pressure SCBA.
Escape: Gas mask with canister to protect against carbon monoxide; or escape-type SCBA.
NOTE: End of Service Life Indicator (ESLI) required for gas masks.
NOTE: The IDLH concentration for Carbon Monoxide is 1200 ppm.

EYE PROTECTION: Safety glasses. If necessary, refer to U.S. OSHA 29 CFR 1910.133 or appropriate Canadian Standards.

HAND PROTECTION: Wear leather gloves when handling cylinders. Chemically resistant gloves should be worn when using this gas mixture. If necessary, refer to U.S. OSHA 29 CFR 1910.138 or appropriate Standards of Canada.

BODY PROTECTION: No special protection is needed under normal circumstances of use. If a hazard of injury to the feet exists due to falling objects, rolling objects, where objects may pierce the soles of the feet or where employee's feet may be exposed to electrical hazards, use foot protection, as described in U.S. OSHA 29 CFR 1910.136.

9. PHYSICAL and CHEMICAL PROPERTIES

The following information is for Nitrogen, the main component of this gas mixture.

GAS DENSITY @ 32°F (0→C) and 1 atm: .072 lbs/ ft³ (1.153 kg/m³)
FREEZING/MELTING POINT @ 10 psig: -345.8°F (-210°C)
SPECIFIC GRAVITY (air = 1) @ 70°F (21.1°C): 0.906
SOLUBILITY IN WATER vol/vol @ 32°F (0→C) and 1 atm: 0.023
EVAPORATION RATE (nBuAc = 1): Not applicable.
VAPOR PRESSURE @ 70°F (21.1°C) (psig): Not applicable.
COEFFICIENT WATER/OIL DISTRIBUTION: Not applicable.

BOILING POINT: -320.4°F (-195.8°C)
pH: Not applicable.
MOLECULAR WEIGHT: 28.01
EXPANSION RATIO: Not applicable.
SPECIFIC VOLUME (ft³/lb): 13.8

The following information is for this gas mixture.

ODOR THRESHOLD: 0.13 ppm (Hydrogen Sulfide)
APPEARANCE AND COLOR: This gas mixture is a colorless gas which has an rotten egg-like odor, due to the presence of Hydrogen Sulfide.
HOW TO DETECT THIS SUBSTANCE (warning properties): Continuous inhalation of low concentrations of this gas mixture may cause olfactory fatigue, due to the presence of Hydrogen Sulfide, so the odor is not a good warning property of a release of this gas mixture. In terms of leak detection, fittings and joints can be painted with a soap solution to detect leaks, which will be indicated by a bubble formation. Wet lead acetate paper can be used for leak detection. The paper turns black in the presence of Hydrogen Sulfide. Cadmium chloride solutions can also be used. Cadmium solutions will turn yellow upon contact with Hydrogen Sulfide.

10. STABILITY and REACTIVITY

STABILITY: Normally stable in gaseous state.

DECOMPOSITION PRODUCTS: The thermal decomposition products of Methane include carbon oxides. The decomposition products of Hydrogen Sulfide include water and sulfur oxides. The other components of this gas mixture do not decompose, per se, but can react with other compounds in the heat of a fire.

MATERIALS WITH WHICH SUBSTANCE IS INCOMPATIBLE: Titanium will burn in Nitrogen (the main component of this gas mixture). Lithium reacts slowly with Nitrogen at ambient temperatures. Components of this gas mixture (Hydrogen Sulfide, Methane) are also incompatible with strong oxidizers (i.e. chlorine, bromine pentafluoride, oxygen, oxygen difluoride, and nitrogen trifluoride). Carbon Monoxide is mildly corrosive to nickel and iron (especially at high temperatures and pressures). Hydrogen Sulfide is corrosive to most metals, because it reacts with these substances to form metal sulfides.

HAZARDOUS POLYMERIZATION: Will not occur.

CONDITIONS TO AVOID: Contact with incompatible materials. Cylinders exposed to high temperatures or direct flame can rupture or burst.

11. TOXICOLOGICAL INFORMATION

TOXICITY DATA: The following toxicology data are available for the components of this gas mixture:

NITROGEN:

There are no specific toxicology data for Nitrogen. Nitrogen is a simple asphyxiant, which acts to displace oxygen in the environment.

METHANE:

There are no specific toxicology data for Methane. Methane is a simple asphyxiant, which acts to displace oxygen in the environment.

CARBON MONOXIDE:

LC₅₀ (Inhalation-Rat) 1807 ppm/4 hours
LC₅₀ (Inhalation-Mouse) 2444 ppm/4 hours
LC₅₀ (Inhalation-Guinea Pig) 5718 ppm/4 hours
LC₅₀ (Inhalation-wild bird species) 1334 ppm
LCLo (Inhalation-Human) 4 mg/m³/12 hours: Behavioral: coma; Vascular: BP lowering not characterized in autonomic section; Blood: methemoglobinemia-carboxyhemoglobin
LCLo (Inhalation-Man) 4000 ppm/30 minutes
LCLo (Inhalation-Human) 5000 ppm/5 minutes
LCLo (Inhalation-Dog) 4000 ppm/46 minutes
LCLo (Inhalation-Rabbit) 4000 ppm
LCLo (Inhalation-Mammal-species unspecified) 5000 ppm/5 minutes
TCLo (Inhalation-Human) 600 mg/m³/10 minutes: Behavioral: headache
TCLo (Inhalation-Man) 650 ppm/45 minutes: Blood: methemoglobinemia-carboxyhemoglobin; Behavioral: changes in psychophysiological tests
TCLo (Inhalation-Rat) 1800 ppm/1 hour/14 days-intermittent: Cardiac: other changes
TCLo (Inhalation-Rat) 30 mg/m³/8 hours/10 weeks-intermittent: Brain and Coverings: other degenerative changes; Behavioral: muscle contraction or spasticity
TCLo (Inhalation-Rat) 96 ppm/24 hours/90 days-continuous: Blood: pigmented or nucleated red blood cells, other changes
TCLo (Inhalation-Rat) 250 ppm/5 hours/20 days-intermittent: Blood :pigmented or nucleated red blood cells, changes in other cell count (unspecified), changes in erythrocyte (RBC) count
TDLo (Subcutaneous-Rat) 5983 mg/kg/18 weeks-intermittent: Blood: changes in serum composition (e.g. TP, bilirubin, cholesterol)
TCLo (Inhalation-Monkey) 200 ppm/24 hours/90 days-continuous: Blood: pigmented or nucleated red blood cells, other changes
TCLo (Inhalation-Rabbit) 200 mg/m³/3 hours/13 weeks-intermittent: Brain and Coverings: other degenerative changes; Cardiac: other changes; Blood: hemorrhage
TCLo (Inhalation-Guinea Pig) 200 mg/m³/5 hours/30 weeks-continuous: Cardiac: arrhythmias (including changes in conduction), EKG changes not diagnostic of specified effects, pulse rate increase, without fall in BP

CARBON MONOXIDE (continued):

TCLo (Inhalation-Mouse) 50 ppm/30 days-intermittent: Lungs, Thorax, or Respiration: structural or functional change in trachea or bronchi
TCLo (Inhalation-Guinea Pig) 200 mg/m³/5 hours/4 weeks-intermittent: Endocrine: hyperglycemia
TCLo (Inhalation-Guinea Pig) 200 ppm/24 hours/90 days-continuous: Blood: pigmented or nucleated red blood cells, other changes
TCLo (Inhalation-Rat) 75 ppm/24 hours: female 0-20 day(s) after conception: Reproductive: Maternal Effects: other effects; Effects on Newborn: behavioral
TCLo (Inhalation-Rat) 150 ppm/24 hours: female 1-22 day(s) after conception: Reproductive: Specific Developmental Abnormalities: cardiovascular (circulatory) system
TCLo (Inhalation-Rat) 150 ppm/24 hours: female 1-22 day(s) after conception: Reproductive: Effects on Newborn: growth statistics (e.g.%, reduced weight gain), behavioral
TCLo (Inhalation-Rat) 1 mg/m³/24 hours: female 72 day(s) pre-mating: Reproductive: Maternal Effects: menstrual cycle changes or disorders, parturition; Fertility: female fertility index (e.g. # females pregnant per # sperm positive females; # females pregnant per # females mated)
TCLo (Inhalation-Rat) 150 ppm/24 hours: female 0-20 day(s) after conception: Reproductive: Effects on Newborn: behavioral
TCLo (Inhalation-Rat) 75 ppm/24 hours: female 0-20 day(s) after conception: Reproductive: Specific Developmental Abnormalities: immune and reticuloendothelial system
TCLo (Inhalation-Mouse) 65 ppm/24 hours: female 7-18 day(s) after conception: Reproductive: Effects on Newborn: behavioral
TCLo (Inhalation-Mouse) 250 ppm/7 hours: female 6-15 day(s) after conception: Reproductive: Fertility: post-implantation mortality (e.g. dead and/or resorbed implants per total number of implants); Specific Developmental Abnormalities: musculoskeletal system
TCLo (Inhalation-Mouse) 125 ppm/24 hours: female 7-18 day(s) after conception: Reproductive: Effects on Embryo or Fetus: fetotoxicity (except death, e.g., stunted fetus)
TCLo (Inhalation-Mouse) 8 pph/1 hour: female 8 day(s) after conception: Reproductive: Fertility: litter size (e.g. # fetuses per litter; measured before birth); Effects on Embryo or Fetus: fetotoxicity (except death, e.g., stunted fetus), fetal death

CARBON MONOXIDE (continued):

TCLo (Inhalation-Rabbit) 50 ppm/24 hours/8 weeks-continuous: Blood: changes in platelet count
TCLo (Inhalation-Mouse) 8 pph/1 hour: female 8 day(s) after conception: Reproductive: Specific Developmental Abnormalities: Central Nervous System
TCLo (Inhalation-Rabbit) 180 ppm/24 hours: female 1-30 day(s) after conception: Reproductive: Effects on Newborn: stillbirth, viability index (e.g., # alive at day 4 per # born alive)
Micronucleus Test (Inhalation-Mouse)1500 ppm/10 minutes
Sister Chromatid Exchange (Inhalation-Mouse) 2500 ppm/10 minutes
HYDROGEN SULFIDE:
LC₅₀ (Inhalation-Rat) 444 ppm: Lungs, Thorax, or Respiration: other changes; Gastrointestinal: hypermotility, diarrhea; Kidney, Ureter, Bladder: urine volume increased
LC₅₀ (Inhalation-Mouse) 634 ppm/1 hour
LCLo (Inhalation-Human) 600 ppm/30 minutes
LCLo (Inhalation-Man) 5700 µg/kg: Behavioral: coma; Lungs, Thorax, or Respiration: chronic pulmonary edema
LCLo (Inhalation-Human) 800 ppm/5 minutes
LCLo (Inhalation-Mammal-species unspecified) 800 ppm/5 minutes
TCLo (Inhalation-Rat) 30 ppm/6 hours/10 weeks-intermittent: Sense Organs and Special Senses (Olfaction): olfactory nerve change, effect, not otherwise specified
TCLo (Inhalation-Rat) 1200 mg/m³/2 hours/5 days-intermittent: Brain and Coverings: other degenerative changes; Biochemical: Enzyme inhibition, induction, or change in blood or tissue levels: true cholinesterase
TCLo (Inhalation-Rat) 100 ppm/8 hours/5 weeks-intermittent: Brain and Coverings: other degenerative changes; Lungs, Thorax, or Respiration: other changes; Biochemical: Enzyme inhibition, induction, or change in blood or tissue levels: cytochrome oxidases (including oxidative phosphorylation)
TCLo (Inhalation-Rat) 80 ppm/6 hours/90 days-intermittent: Brain and Coverings: changes in brain weight; Nutritional and Gross Metabolic: weight loss or decreased weight gain
TCLo (Inhalation-Rat) 20 ppm: female 6-22 day(s) after conception lactating female 21 day(s) post-birth: Reproductive: Effects on Newborn: physical
TCLo (Inhalation-Mouse) 80 ppm/6 hours/90 days-intermittent: Nutritional and Gross Metabolic: weight loss or decreased weight gain; Related to Chronic Data: death
TCLo (Inhalation-Rabbit) 40 mg/m³/5 hours/30 weeks-intermittent: Sense Organs and Special Senses (Eye): conjunctive irritation

SUSPECTED CANCER AGENT: The components of this gas mixture are not found on the following lists: FEDERAL OSHA Z LIST, NTP, CAL/OSHA, and IARC; therefore, they are not considered to be, nor suspected to be, cancer-causing agents by these agencies.

IRRITANCY OF PRODUCT: This gas mixture is irritating to the eyes, and may be irritating to the skin.

SENSITIZATION OF PRODUCT: The components of this gas mixture are not known to be skin or respiratory sensitizers.

REPRODUCTIVE TOXICITY INFORMATION: Listed below is information concerning the effects of this gas mixture on the human reproductive system.

Mutagenicity: The components of this gas mixture are not reported to cause mutagenic effects in humans.

REPRODUCTIVE TOXICITY INFORMATION (continued):

Embryotoxicity: This gas mixture contains components that may cause embryotoxic effects in humans; however, due to the small total amount of the components, embryotoxic effects are not expected to occur.

Teratogenicity: This gas mixture is not expected to cause teratogenic effects in humans due to the small cylinder size and small total amount of all components. The Carbon Monoxide component of this gas mixture which exists up to 1%, can cause teratogenic effects in humans. Severe exposure to Carbon Monoxide during pregnancy has caused adverse effects and the death of the fetus. In general, maternal symptoms are an indicator of the potential risk to the fetus since Carbon Monoxide is toxic to the mother before it is toxic to the fetus.

Reproductive Toxicity: The components of this gas mixture are not reported to cause adverse reproductive effects in humans.

A *mutagen* is a chemical which causes permanent changes to genetic material (DNA) such that the changes will propagate through generation lines. An *embryotoxin* is a chemical which causes damage to a developing embryo (i.e. within the first eight weeks of pregnancy in humans), but the damage does not propagate across generational lines. A *teratogen* is a chemical which causes damage to a developing fetus, but the damage does not propagate across generational lines. A *reproductive toxin* is any substance which interferes in any way with the reproductive process.

BIOLOGICAL EXPOSURE INDICES (BEIs): Biological Exposure Indices (BEIs) have been determined for components of this gas mixture, as follows:

CHEMICAL DETERMINANT	SAMPLING TIME	BEI
CARBON MONOXIDE • Carboxyhemoglobin in blood • Carbon monoxide in end-exhaled air	• End of shift • End of shift	• 3.5% of hemoglobin • 20 ppm

12. ECOLOGICAL INFORMATION

ENVIRONMENTAL STABILITY: The gas will be dissipated rapidly in well-ventilated areas. The following environmental data are applicable to the components of this gas mixture.

CARBON MONOXIDE:

Atmospheric Fate: A photochemical model was used to quantify the sensitivity of the tropospheric oxidants ozone (O₃) and OH to changes in methane (CH₄), Carbon Monoxide (CO), and NO emissions and to perturbations in climate and stratospheric chemistry. In most cases, increased CH₄ and CO emissions will suppress OH (negative coefficients) in increased O₃ (positive coefficients) except in areas where NO and O₃ influenced by pollution are sufficient to increased OH. In most regions, NO, CO, and CH₄ emission increased will suppress OH and increased O₃, but these trends may be opposed by stratospheric O3 depletion and climate change.

HYDROGEN SULFIDE:

Water Solubility = 1 g/242 mL at 20→C.

Plant toxicity: Continuous fumigation of plants with 300 or 3000 ppb Hydrogen Sulfide caused leaf lesions, defoliation, and reduced growth with severity of injury correlated to dose. At higher (3.25 and 5.03 ppm) Hydrogen Sulfide, significant reductions in leaf CO2 and water vapor exchanges occurred, and stomatal openings were depressed. When Hydrogen Sulfide gas was applied to 29 species of green plants for 5 hours, young, rapidly elongating tissues were more sensitive to injury than older tissues. Symptoms included scorching of young shoots and

12. ECOLOGICAL INFORMATION(continued)		
leaves, basal and marginal scorching of older leaves. Mature leaves were unaffected. Seeds exposed to Hydrogen Sulfide gas showed delay in germination.		
Persistence: Converts to elemental sulfur upon standing in water.		
Major Species Threatened: Aquatic and animal life plants may be injured if exposed to 5 ppm in air over 24 hours.		
Biodegradation: Microorganisms in soil and water are involved in oxidation-reduction reactions that oxidize hydrogen sulfide to elemental sulfur. Members of the genera Beggiatoa, Thioploca, and Thiotrix function in transition zones between aerobic and anaerobic conditions where both molecular oxygen and hydrogen sulfide are found. Also, some photosynthetic bacteria oxidize hydrogen sulfide to elemental sulfur. Members of the families Chlorobiaceae and Chromatiaceae (purple sulfur bacteria) are obligate aerobes and are phototrophic, and are found in waters with high H ₂ S concentrations. The interactions of these organisms form part of the global sulfur cycle.		
Bioconcentration: Does not have bioaccumulation or food chain contamination potential.		
NITROGEN: Water Solubility = 2.4 volumes Nitrogen/100 volumes water at 0→C; 1.6 volumes Nitrogen/100 volumes water at 20→C.		
EFFECT OF MATERIAL ON PLANTS or ANIMALS: No evidence is currently available on this gas mixture's effects on plant and animal life. Hydrogen Sulfide and Carbon Monoxide, components of this gas mixture, can be deadly to exposed animal life, producing symptoms similar to those experienced by humans. This gas mixture may also be harmful to plant life.		
EFFECT OF CHEMICAL ON AQUATIC LIFE: No evidence is currently available on this gas mixture's effects on aquatic life. The presence of more than a trace of the Carbon Monoxide component of this gas mixture is a hazard to fish. The following aquatic toxicity data are available for the Hydrogen Sulfide component of this gas mixture:		
HYDROGEN SULFIDE:	HYDROGEN SULFIDE (continued):	HYDROGEN SULFIDE (continued):
LC ₅₀ (<i>Asellus</i> arthropods) 96 hours = 0.111 mg/L	LC ₅₀ ,F (bluegill, 35-day-old fry) 96 hours = 0.0131 mg/L	Lethal (goldfish) 96 hours = 10 mg/L
LC ₅₀ (<i>Crangon</i> arthropods) 96 hours = 1.07 mg/L	LC ₅₀ ,F (bluegill, juveniles) 96 hours = 0.0478 mg/L	Toxic (carp) 24 hours = 3.3 mg/L
LC ₅₀ (<i>Gammarus</i> arthropods) 96 hours = 0.84 mg/L	LC ₅₀ ,F (bluegill, adults) 96 hours = 0.0448 mg/L	Toxic (goldfish) 24 hours = 4.3 mg/L
LC ₅₀ (Ephemera) 96 hours = 0.316 mg/L	LC ₅₀ ,F (fathead minnows) 96 hours = 0.0071-0.55 mg/L	Toxic (sunfish) 1 hour = 4.9 to 5.3 mg/L
LC ₅₀ (Inhalation-Flies) > 960 minutes = 380 mg/m ³	LC ₅₀ ,F (bluegill) 96 hours = 0.0090-0.0140 mg/L	Toxic (goldfish) 200 hours = 5 mg/L
LC ₅₀ (Inhalation-Flies) 7 minutes = 1,500 mg/m ³	LC ₅₀ ,F (brook trout) 96 hours = 0.0216-0.0308 mg/L	Toxic (minnows) 24 hours = 5-6 mg/L
LC ₅₀ ,F (bluegill, eggs) 72 hours = 0.0190 mg/L	Toxic (goldfish) = 100 mg/L	Toxic (carp) 24 hours = 6-25 mg/L
		Toxic (trout) 15 minutes = 10 mg/L
		Toxic (goldfish) 24 hours = 25 mg/L
		Toxic (tench) 3 hours = 100 mg/L
		MATC,F (fathead minnows) 0.0037 mg/L
		MATC,F (bluegill) 0.0004 mg/L
		MATC,F (brook trout) 0.055 mg/L

13. DISPOSAL CONSIDERATIONS

PREPARING WASTES FOR DISPOSAL PREPARING WASTES FOR DISPOSAL: Waste disposal must be in accordance with appropriate Federal, State, and local regulations. Cylinders with undesired residual product may be safely vented outdoors with the proper regulator. For further information, refer to Section 16 (Other Information).

14. TRANSPORTATION INFORMATION

THIS GAS MIXTURE IS HAZARDOUS AS DEFINED BY 49 CFR 172.101 BY THE U.S. DEPARTMENT OF TRANSPORTATION.

PROPER SHIPPING NAME: Compressed gases, n.o.s. (*Oxygen, Nitrogen)*or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

DOT LABEL(S) REQUIRED: Non-Flammable Gas

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

U.S. DEPARTMENT OF TRANSPORTATION INFORMATION (continued):

MARINE POLLUTANT: The components of this gas mixture are not classified by the DOT as Marine Pollutants (as defined by 49 CFR 172.101, Appendix B).

SPECIAL SHIPPING INFORMATION: Cylinders should be transported in a secure position, in a well-ventilated vehicle. The transportation of compressed gas cylinders in automobiles or in closed-body vehicles can present serious safety hazards. If transporting these cylinders in vehicles, ensure these cylinders are not exposed to extremely high temperatures (as may occur in an enclosed vehicle on a hot day). Additionally, the vehicle should be well-ventilated during transportation.

Note: DOT 39 Cylinders ship in a strong outer carton (outer package). Pertinent shipping information goes on the outside of the outer package. DOT 39 Cylinders do not have transportation information on the cylinder itself.

TRANSPORT CANADA TRANSPORTATION OF DANGEROUS GOODS REGULATIONS: This gas mixture is considered as Dangerous Goods, per regulations of Transport Canada.

PROPER SHIPPING NAME: Compressed gases, n.o.s. (*Oxygen, Nitrogen)*or the gas component with the next highest concentration next to Nitrogen.

HAZARD CLASS NUMBER and DESCRIPTION: 2.2 (Non-Flammable Gas)

UN IDENTIFICATION NUMBER: UN 1956

PACKING GROUP: Not Applicable

HAZARD LABEL: Class 2.2 (Non-Flammable Gas)

SPECIAL PROVISIONS: None

EXPLOSIVE LIMIT AND LIMITED QUANTITY INDEX: 0.12

ERAP INDEX: 3000

PASSENGER CARRYING SHIP INDEX: Forbidden

PASSENGER CARRYING ROAD VEHICLE OR PASSENGER CARRYING RAILWAY VEHICLE INDEX: Forbidden

NORTH AMERICAN EMERGENCY RESPONSE GUIDEBOOK NUMBER (2000): 126

NOTE: Shipment of compressed gas cylinders via Public Passenger Road Vehicle is a violation of Canadian law (Transport Canada Transportation of Dangerous Goods Act, 1992).

15. REGULATORY INFORMATION

ADDITIONAL U.S. REGULATIONS:

U.S. SARA REPORTING REQUIREMENTS: This gas mixture is subject to the reporting requirements of Sections 302, 304, and 313 of Title III of the Superfund Amendments and Reauthorization Act, as follows:

CHEMICAL NAME	SARA 302 (40 CFR 355, Appendix A)	SARA 304 (40 CFR Table 302.4)	SARA 313 (40 CFR 372.65)
Hydrogen Sulfide	YES	YES	YES

U.S. SARA THRESHOLD PLANNING QUANTITY: Hydrogen Sulfide = 500 lb (227 kg)

U.S. TSCA INVENTORY STATUS: The components of this gas mixture are listed on the TSCA Inventory.

U.S. CERCLA REPORTABLE QUANTITY (RQ): Hydrogen Sulfide = 100 lb (45 kg)

OTHER U.S. FEDERAL REGULATIONS:

- Hydrogen Sulfide and Carbon Monoxide are subject to the reporting requirements of CFR 29 1910.1000.
- Hydrogen Sulfide and Methane are subject to the reporting requirements of Section 112(r) of the Clean Air Act. The Threshold Quantity for each of these gases is 10,000 pounds and so this mixture will not be affected by the regulation.
- Depending on specific operations involving the use of this gas mixture, the regulations of the Process Safety Management of Highly Hazardous Chemicals may be applicable (29 CFR 1910.119). Hydrogen Sulfide is listed in Appendix A of this regulation. The Threshold Quantity for Hydrogen Sulfide under this regulation is 1500 lbs (and so one cylinder of this gas mixture will not be affected by this regulation).
- This gas mixture does not contain any Class I or Class II ozone depleting chemicals (40 CFR part 82).
- Nitrogen and Oxygen are not listed Regulated Substances, per 40 CFR, Part 68, of the Risk Management for Chemical Releases. Hydrogen Sulfide is listed under this regulation in Table 1 as a Regulated Substance (Toxic Substance), in quantities of 10,000 lbs (4,553 kg) or greater.

15. REGULATORY INFORMATION(continued)

Carbon Monoxide and Methane are listed under this regulation in Table 3, as Regulated Substances (Flammable), in quantities of 10,000 lbs (4,553 kg) or greater, and so this mixture will not be affected by the regulation.

U.S. STATE REGULATORY INFORMATION: The components of this gas mixture are covered under the following specific State regulations:

Alaska - Designated Toxic and Hazardous Substances: Carbon Monoxide, Hydrogen Sulfide, Methane.	Michigan - Critical Materials Register: No.	Pennsylvania - Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Hydrogen Sulfide, Methane.
California - Permissible Exposure Limits for Chemical Contaminants: Carbon Monoxide, Nitrogen, Hydrogen Sulfide, Methane.	Minnesota - List of Hazardous Substances: Carbon Monoxide, Hydrogen Sulfide, Methane.	Rhode Island - Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Hydrogen Sulfide, Methane.
Florida - Substance List: Oxygen, Carbon Monoxide, Hydrogen Sulfide	Missouri - Employer Information/Toxic Substance List t: Hydrogen Sulfide, Methane.	Texas - Hazardous Substance List: Hydrogen Sulfide.
Illinois - Toxic Substance List: Carbon Monoxide, Methane, Hydrogen Sulfide.	New Jersey - Right to Know Hazardous Substance List: Oxygen, Carbon Monoxide, Nitrogen, Methane.	West Virginia - Hazardous Substance List: Hydrogen Sulfide.
Kansas - Section 302/313 List: No.	North Dakota - List of Hazardous Chemicals, Reportable Quantities: Hydrogen Sulfide.	Wisconsin - Toxic and Hazardous Substances: Hydrogen Sulfide
Massachusetts - Substance List: Oxygen, Carbon Monoxide, Hydrogen Sulfide, Methane.		

CALIFORNIA SAFE DRINKING WATER AND TOXIC ENFORCEMENT ACT (PROPOSITION 65): The Carbon Monoxide component of this gas mixture is on the California Proposition 65 lists. **WARNING!** This gas mixture contains a compound known to the State of California to cause birth defects or other reproductive harm.

ADDITIONAL CANADIAN REGULATIONS:

CANADIAN DSL/NDL INVENTORY STATUS: The components of this gas mixture are listed on the DSL Inventory.

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA) PRIORITIES SUBSTANCES LISTS: The components of this gas mixture are not on the CEPA Priorities Substances Lists.

CANADIAN WHMIS CLASSIFICATION: This gas mixture is categorized as a Controlled Product, Hazard Classes A and D2A, as per the Controlled Product Regulations.

16. OTHER INFORMATION

INFORMATION ABOUT DOT-39 NRC (Non-Refillable Cylinder) PRODUCTS

DOT 39 cylinders ship as hazardous materials when full. Once the cylinders are relieved of pressure (empty) they are not considered hazardous material or waste. Residual gas in this type of cylinder is not an issue because toxic gas mixtures are prohibited. Calibration gas mixtures typically packaged in these cylinders are Nonflammable n.o.s., UN 1956. A small percentage of calibration gases packaged in DOT 39 cylinders are flammable or oxidizing gas mixtures.

For disposal of used DOT-39 cylinders, it is acceptable to place them in a landfill if local laws permit. Their disposal is no different than that employed with other DOT containers such as spray paint cans, household aerosols, or disposable cylinders of propane (for camping, torch etc.). When feasible, we recommended recycling for scrap metal content. CALGAZ will do this for any customer that wishes to return cylinders to us prepaid. All that is required is a phone call to make arrangements so we may anticipate arrival. Scrapping cylinders involves some preparation before the metal dealer may accept them. We perform this operation as a service to valued customers who want to participate.

MIXTURES: When two or more gases or liquefied gases are mixed, their hazardous properties may combine to create additional, unexpected hazards. Obtain and evaluate the safety information for each component before you produce the mixture. Consult an Industrial Hygienist or other trained person when you make your safety evaluation of the end product. Remember, gases and liquids have properties which can cause serious injury or death.

Further information about the handling of compressed gases can be found in the following pamphlets published by: Compressed Gas Association Inc. (CGA), 1725 Jefferson Davis Highway, Suite 1004, Arlington, VA 22202-4102. Telephone: (703) 412-0900.

P-1	"Safe Handling of Compressed Gases in Containers"
AV-1	"Safe Handling and Storage of Compressed Gases"
	"Handbook of Compressed Gases"



This Material Safety Data Sheet is offered pursuant to OSHA's Hazard Communication Standard, 29 CFR, 1910.1200. Other government regulations must be reviewed for applicability to this gas mixture. To the best of CALGAZ knowledge, the information contained herein is reliable and accurate as of this date; however, accuracy, suitability or completeness are not guaranteed and no warranties of any type, either express or implied, are provided. The information contained herein relates only to this specific product. If this gas mixture is combined with other materials, all component properties must be considered. Data may be changed from time to time. Be sure to consult the latest edition.