


Model 6341, 6342, 6275 Replaceable Tip Precision Electronic Probe

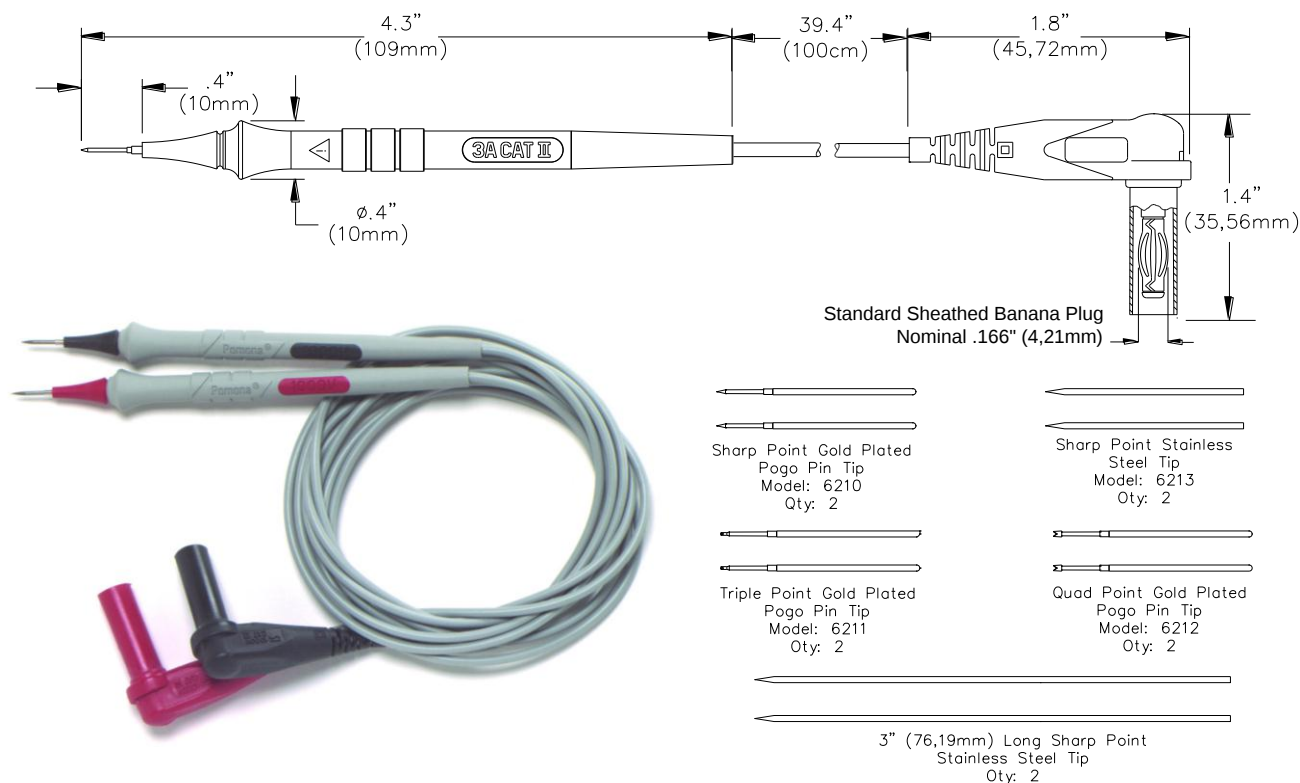

FEATURES:

- Miniature probe is the perfect size for probing tiny, high-density circuits.
- Gold plated pogo pin tip keeps constant pressure on test point for consistent readings.
- Replaceable probe tips.
- Safety design complies with all the latest standards.
- Flexible Silicone insulated wire resists burning.
- Wear indication with double insulated (dual extruded) silicone leads shows black inner layer for increased safety

MATERIALS:

Probe Body: Insulation - Gray Santoprene®
Rubber over Polypropylene.
Right Angle Sheath Banana Plug:
Plug Body: Nickel Plated Brass.
Banana Plug Spring: Nickel Plated Beryllium
Copper.
Insulation: Santoprene®
Wire: 20 AWG, gray silicon rubber 0.089 (2,26mm)
O.D.
Probe Tips: Gold plated or Stainless Steel

RATINGS:

Operating Voltage: IEC 61010-031 CAT II 1000 Vrms Max. *For CE compliance:* The 3" (76,19mm) Long Sharp Point Stainless Steel Tip is not intended for hand-held use at voltage above 30 Vrms/42.4Vpk/60Vdc.
Current: 3 Amperes

ORDERING INFORMATION:

Model: 6341 (one red probe, one black probe with a set of all tip styles)
Model: 6342 (one red probe, one black probe with model 6210 sharp point gold pogo pin tips)
Model: 6275 (one red probe, one black probe with model 6213 sharp point stainless steel tips)
Model: 6354 (replacement tips only, set of all tips)

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Copyright © 2012
D1094722, D1094672, D1094674 Rev. 101

Page 1 of 1